

8-HOUR HAZWOPER REFRESHER

K-3/24 Brian Otter March 24, 2022

> 24th California Unified Program Annual Training Conference March 22, 23, 24, 29, 30, 31 - 2022







FIRE DOG HAZMAT & EMERGENCY TRAINING SPECIALIST


Presents HAZWOPER Refresher Training

A guidebook intended for use by first responders during the initial phase of a transportation incident involving hazardous materials/dangerous goods





A guidebook intended for use by first responders during the initial phase of a transportation incident involving hazardous materials/dangerous goods

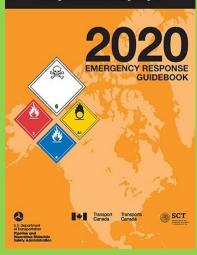

Brian Otter Fire Dog Haz Mat Training Hazmat522@gmail.com



Please Press The Mute Button













Why do we need Training









Put these Apps on your Phone



Wireless Information System for Emergency Responders





CHEMICAL

DEPARTMENT OF HEALTH AND HUMAN SERVICES Centers for Disease Control and Prevention National Institute for Occupational Safety and Health

SEPTEMBER 2007



| нати | Cheekal Datasheet | | 46 | to MyChemicals | Priot Frien | | |
|---|--|--------------------|-----|--------------------------------------|--------------------------------|--|--|
| 460 | | | | | | | |
| search Chemicals | - Incom | 0.115 | | - | * | | |
| New Search | In the second second | | _ | | | | |
| Hedity Search | Chemical I | dentifiers | | | | | |
| iearch Results | CAS Number UN/NA Number 7702-30-5 👖 1017 | | | Hazard Label an Gao lave | USCC CHRM TO CLX | | |
| | | | CIH | (Sivit | | | |
| tychemicals | | | | | International Chem Safety Card | | |
| | N005H Pock | et Galide | | | Safety Card | | |
| herricalus o | NDOSH Pock Diference P | et Galide | | mational Chemi 2020: ² | Safety Card | | |
| nericalu 0 Yon MyChemicab | | et Galide | | | Safety Card | | |
| tyCheneicals nervicals: 0 Aren PlyChemicals Predict Reactivity | there? | et Guide Hatard | | | Safety Card | | |



Course Goals & Objectives 3



- To provide *you* with the necessary awareness of safe and competent Haz-Mat response actions, within the typical resource and capability limits at the 1st. Responder Operational & HAZWOPER level.
- Meet the OSHA HAZCOM training standard within <u>29 CFR</u> <u>1910.1200 & Cal OSHA Title 8 CCR 5194</u>
- Meet the OSHA requirement for qualifications as a first responder within the <u>29 CFR 1910.120 & Cal-OSHA Title 8 CCR 5192</u>





Enforcement & State Response Agencies



- **EPA** Federal State
- DTSC Department of toxic substance control
- SWRCB State water resources control board
- CDFW- Calif. Dept. of Fish & Wildlife
- CHP/Cal Trans
- **OES**
- Cal Fire
- OSHA-Federal State
- Other Agencies
- Air Quality Management Districts
- Local D.A. Environmental crimes unit



<u>CUPAs ///PAs.....Reporting Requirements</u>





Know who your CUPA or PA is so you can make the proper notifications



<u>*Title 19, California Code of Regulations (CCR), §2703–*</u> A person shall provide an immediate, verbal report of any release or threatened release of a hazardous material to the administering agency (CUPA or PA, and OES (800-852-7550)



CUPA ₃

Immediate Reporting of a Release or Threatened Release



• <u>The immediate reporting requirements are not</u> <u>based on the quantity of the material.</u>

<u>They are based on the hazardous material's potential to cause harm to</u> <u>human health and safety, property, or the environment — regardless</u> <u>of the quantity.</u>

#Reasonable Belief #Reasonable Belief #Reasonable Belief #Reasonable Belief





What is a Non-Significant Release



During planned maintenance at a fixed facility, small drips are to be expected and may be considered "not significant," and thus may not be reportable.





What is a Significant Release



Any release of a hazardous material that results in a fatality, chemical exposure, or other injury, to an employee or member of the public.

If any part of a release, including airborne releases, extends outside of the facility boundaries.

Any release or threatened release of a hazardous material that results in an evacuation.

Any release that cannot be immediately mitigated by qualified facility personnel (e.g., spill requires contacting a hazardous waste clean-up contractor for proper remediation).

Any release that requires the use of respiratory protection for mitigation and/or abatement.

Any release or threatened release where emergency response personnel are called.

Any release of a Regulated Substance (CCR Title 19), Extremely Hazardous Waste (CCR Title 22), Extremely Hazardous Substance (EPCRA Section 302) or Acutely Hazardous Material (40 CFR)





Calif. Haz- Mat Spill / Release Notification

To get a OES control number call: (800) 852 - 7550 or (916) 845 - 8911





Federal Reporting Requirements



- If the release poses a significant threat to persons outside the facility you must also report the incident to the National Response Center (NRC)
- A report to the NRC is required if there is a release at a facility of a Extremely Hazardous Substance exceeding the <u>Reportable Quantity</u> (RQ)
- <u>RQs</u> are listed in pounds, and any release amount must be converted into pounds to determine if the <u>RQ</u> was exceeded.
- The phone number to the **NRC is (800) 424-8802.**
- <u>Example: The reportable quantity (RQ) for anhydrous ammonia is</u> 100 pounds or approximately 18 gallons.



WHICH HAZWOPER COURSE SHOULD YOU TAKE ?



CHECK LABELS ON CHEMICAL CONTAINERS But it's such GET a sweet smelling BACK poison. WORK WARNING 00 WEAPONS GRADE DEATH SYRUP TOXIC!

29CFR1910.120(q) levels of responder training required for hazmat emergency response.

FRA FRO TECH

Spec

IC

40/24 Hour HAZWOPER



<u>HAZWOPER</u>



Hazardous Waste Site Operator Emergency Response

 HAZWOPER has training requirements for different kinds of haz-waste workers. Training can range from <u>24 to 40 hours</u>. Supervisors and managers must have the same training as the workers they supervise, plus eight hours of additional training in management of haz- waste sites. <u>8 hour per year refresher training</u>









Who needs HAZWOPER training ?



• <u>The key word when applying HAZWOPER training is</u> <u>"uncontrolled".</u>

- When a chemical emergency occurs, or a site with a potential chemical legacy is discovered, these may be identified as uncontrolled sites by a government body if the "accumulation of hazardous substances creates a threat to the health and safety of individuals or the environment or both."
- HAZWOPER is designed to reduce the risks of chemical exposure to workers employed in one of three very specific activities:







What are the HAZWOPER training requirements for on-site workers who are not directly involved in cleanup activities?

- Workers, such as *utility workers*, who must perform duties at a hazardous waste site that has not yet been characterized but where contamination is expected, do fall under the scope of 29 CFR 1910.120.
- These workers must work under the direction of an on-site supervisor and a site-specific safety and health plan, and must be fully trained and protected pursuant to the HAZWOPER standard.
- When additional information becomes available through site characterization which verifies that there is minimal or no risk of employee exposure to hazardous substances, a lesser degree of PPE and worker training may be acceptable.





What training do I need to clean up a Spill 3

- An incidental release is a release of a hazardous substance which does not pose a significant safety or health hazard to employees in the immediate vicinity or to the employee cleaning it up, nor does it have the potential to become an emergency within a short time frame.
- Incidental releases are limited in quantity, exposure potential, or toxicity and present minor safety or health hazards to employees in the immediate work area or those assigned to clean them up.

• An incidental spill may be safely cleaned up by employees who are familiar with the hazards of the chemicals with which they are working.



Incident Commander



Haz-Mat I.Cs are trained to manage Haz-Mat emergencies beyond that of the 1st.Responder. Upon arrival to the scene, they formally assume command from the 1st.responder, who should have already established a working ICS and would be the interim I.C.

OSHA requires Hazardous Materials Incident Commanders to be trained in accordance with section (q) of the HAZWOPER regulation.







Take FREE, online courses in emergency management from the Federal Emergency Management Agency!





The Independent Study Program (ISP) is a distance learning program offered free of charge to the American public.

- How to Get Started The fastest way to begin taking courses is to visit there website. You can learn about each course, study materials, and submit your final exams all from the convenience of your home or office.
- 1. Obtain a FEMA student ID number at: <u>cdp.dhs.gov/femasid</u>
- 2. Go to the Independent Study Program Website
- training.fema.gov/IS/
- 3. Click on "IS Course List" toward the left side of the page.
- 4. Choose a course, and click on it.

ICS-100.C: Introduction to the Incident Command System ICS-200: ICS for Single Resources and Initial Action Incidents^o



Site Safety Officer



HAZWOPER Standard 29 CFR 1910.120(q)(3)(vii)

States that "The individual in charge of the Incident Command System shall designate a Safety Officer, who is knowledgeable in the operations being implemented at the emergency response site, with specific responsibility to identify and evaluate hazards and to provide direction with respect to the safety of operations for the emergency at hand."

Simply stated, a designated Safety Officer is required to be in place at a hazmat incident. If the incident requires response at the hazmat technician level or above, the Safety Officer should be certified to at least the technician level in order for them to be cognizant of the unique hazards presented 21





P

Is computer-based training acceptable for refresher training?

• Computer-based training may meet some refresher training requirements, provided that it covers topics relevant to workers' assigned duties. It must be supplemented by the opportunity to ask questions of a qualified trainer and by an assessment of hands-on performance of work tasks. <u>40 Hr. online training</u>

still requires you to suit up.

I THINKED MAY....

HAVE SAT AT THIS COMPUTER FOR TOO LONG....



What if refresher training isn't received in 12 months?



- If the date for refresher training has lapsed, the need to repeat initial training must be determined based on the employee's familiarity with safety and health procedures used on site.
- The employee should take the next available refresher training course. "There should be a record in the employee's file indicating why the training has been delayed and when the training will be completed.
- It is up to the employer to decide if the employee still possesses the requisite knowledge and skills to safely and effectively perform their job. Although OSHA typically allows a short grace period, refresher courses must be completed on or before the anniversary date of the employee's initial training.









Hazardous Materials Are Everywhere -And They Are Always Hazardous







Chemicals in Our World







Hazardous Materials Exist in ² Only Two States

Normal

"Controlled States"



Emergency

"Uncontrolled States















Normal

Transportation



End Use







Emergency Issue

- Timing of the Release
- Size of the Release
- Length of Exposure
- Lethal or Harm of the Release







Fact: 2 In an Emergency -**Always Focus On The Outcome**

Direct

Fatalities / Injuries **Property Damage Environmental** Damage



Indirect

Damaged Reputation Critical System Disruption Residual Fear







Hazardous Materials Are The Great Equalizers -They Hurt Anyone and Everyone



Fact:








Where You Stand Directly Influences Your Perception of The Event

- <u>Safe</u> No harmful effects from chemicals exist at the present time.
- <u>Unsafe</u> Atmospheres or concentrations that will cause harm if you are exposed to them for a prolonged period of time.
- <u>Dangerous</u> Situations or conditions that are an immediate threat to life and health. Such atmospheres could be deadly and result in catastrophic events.








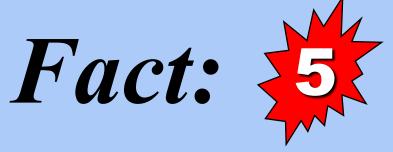



• In An Emergency -What You Do In The First Five Minutes Affects Can Affect You Rest The Of Your Life









Don't Rush In!!!



Think ...Think ... Think!!

If You Don't Know.. Don't Go..













In Every Emergency Your First Job is to **Recognize and Identify** In Order To Stay Alive



BOMB SQUAD



YOU SEE US RUNNING. TRY TO KEEP UP





Hazard Recognition Clues

Must First Know How to Recognize Haz Mat Incidents



The most important action we can perform as first responders is to <u>identify</u> <u>that a hazardous material is present,</u> <u>determine what the material is and</u> <u>evaluate the threats the material poses.</u>





Occupancy and Location







Container Shapes & Sizes







Markings & Colors








Placards & Labels





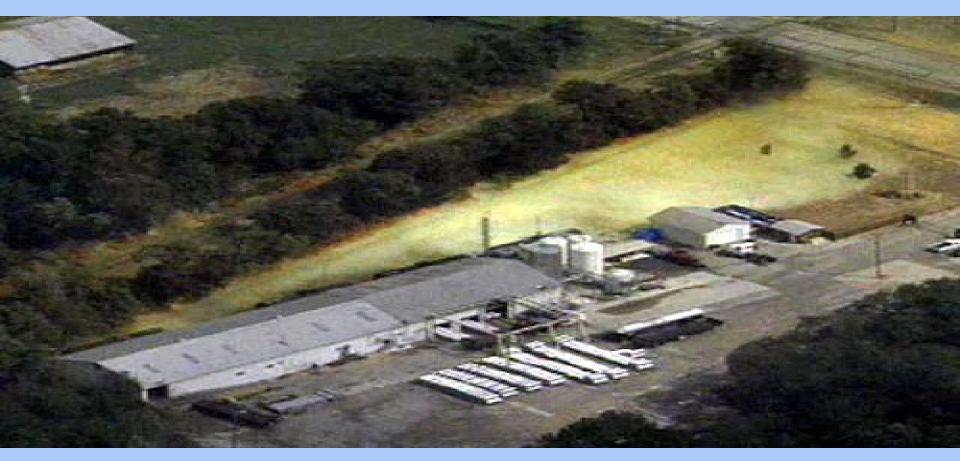

- Location can influence dispersion
 - Stuff goes downhill
 - Buildings can trap and/or redirect airborne contaminants





- Weather and Time of day can affect:
 - Gases/vapors will usually go downwind
 - Vapor clouds can take longer to disperse in cold weather











Stage of incident

Dynamic or Static

- (short vs. long duration release)
- Long Term Clean up





•Type, condition & behavior of container









•Size of problem •(5 gallon vs. 500 gallon)








Predicted Behavior 6



- Before intervention
- •Try to predict behavior of release
 - •What will it do?
 - •Where will it go?
 - •What will it hurt ?

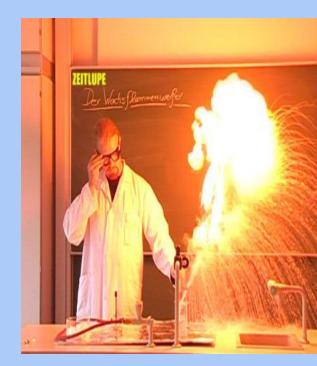

- •Outcome of natural stabilization?
- Favorable impact intervention will make?



Container Stress & Behavior



- Haz-mats are released when container fails
 - Failure can be minor or catastrophic
 - Nature of failure determines potential harm





Types of Container Stress


Ţ

Type of stress ? When/How will container weaken & fail ? What material will be released ? Who much & how fast ? What & who will be in harms way ?



Complications in Hazard Assessment



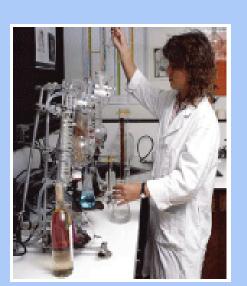

- Multiple Haz Mats or "Mixed Bag" problem
 - May need chemist or Haz Mat team to aid in IDHA & action planning










Low Risk



- •Small quantities
- Inert solid materials
- Undamaged container

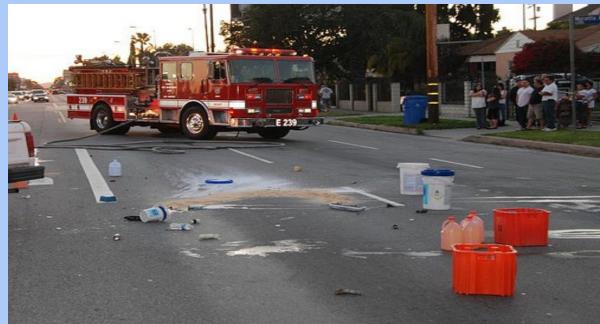



Moderate Risk







- Smaller quantities
- •Low vapor-pressure liquid materials
- Undamaged/slightly damaged container



<u>High Risk</u>





- Large quantities/multiple containers
- Low vapor-pressure liquids or gases
- Slightly/moderately damaged container






- Larger quantities and/or gas cylinders involved
- High vapor-pressure liquids, gases, explosives and/or reactive materials
- Visibly stressed container and/or flame impingement on a gas cylinder





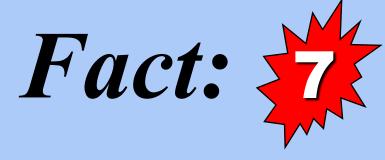



Information is Important - But Information Management is Critical To Survival








Information - The Big Three

Quality of The Information Time To Acquire The Information Ability To Use The Information

- Location
- Name of person reporting Substance released Nature of problem Quantity released
- Other potential hazards









Wireless Information System for Emergency Responders



Hazard Identification














A guidebook intended for use by first responders during the initial phase of a transportation incident involving hazardous materials/dangerous goods

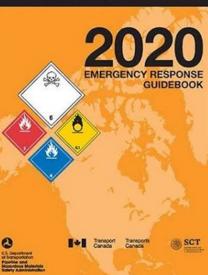



Hazard Identification



Identification can also be made in the field with sampling and testing kits. This may or may not be time-consuming.





Take Inventory of Your Chemicals₄



- Safe storage begins with an up-to-date inventory of hazardous chemicals.
- An accurate inventory is also necessary if emergency responders are to respond effectively to a fire or chemical release.
- Your business can be fined if it does not provide an inventory to the CUPA or PA.
- Unified information required to be submitted and reported electronically to CERS includes, but is not limited to facility data regarding hazardous material regulatory activities (such as, hazardous materials business plans, site maps, and chemical inventories), underground and aboveground storage tanks, hazardous waste generation, and inspection, compliance and enforcement actions.







What Is GHS ?



The Globally Harmonized System of Classification and Labelling of Chemicals is an internationally agreed-upon standard managed by the United Nations that was set up to replace the assortment of hazardous material classification and labelling schemes previously used around the world.



The Globally Harmonized System of Classification and Labeling of Chemicals

GHS Haz Com 2012





MSDS vs. SDS



MSDS have 9 information points:


- Product Information: product identifier (name), manufacturer and suppliers names, addresses, and emergency phone numbers
- 2. Hazardous Ingredients
- 3. Physical Data
- 4. Fire or Explosion Hazard Data
- Reactivity Data: information on the chemical instability of a product and the substances it may react with
- 6. Toxicological Properties: health effects
- 7 Preventive Measures
- 8. First Aid Measures
- 9. Preparation Information: who is responsible for preparation and date of preparation of MSDS

- SDS have 16 information points:
- 1. Identification
- Hazard(s) identification
- 3. Composition/information on ingredients
- 4. First-aid measures
- 5. Fire-fighting measures
- 6. Accidental release measures
- 7. Handling and Storage
- 8. Exposure controls/personal protection
- 9. Physical and chemical properties
- 10. Stability and reactivity
- 11. Toxicological information
- 12. Ecological information
- 13. Disposal considerations
- 14. Transport information
- 15. Regulatory information
- 16. Other information



GHS Pictograms



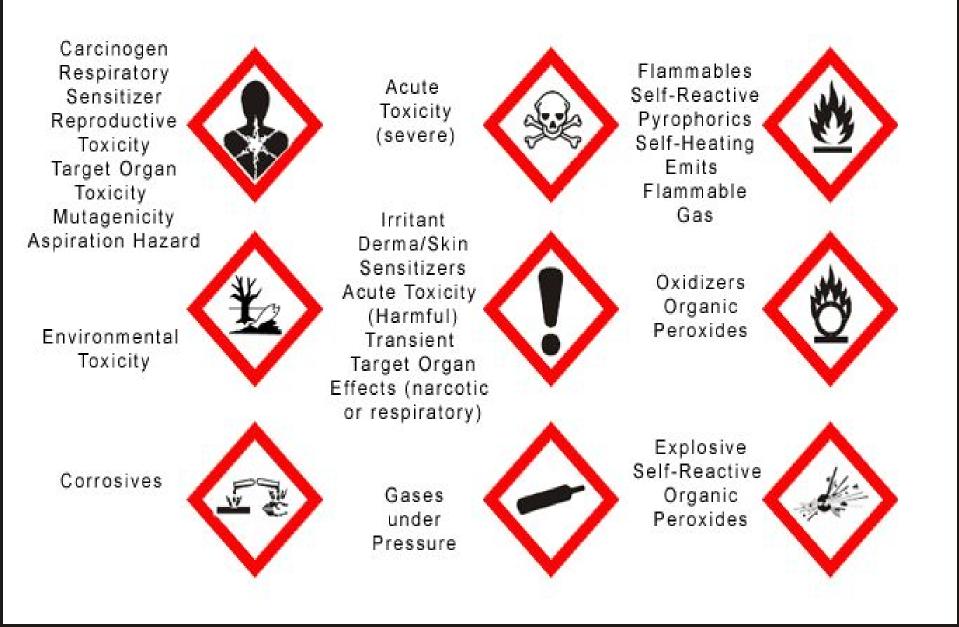



DOT Labels/Placards



You can look at their colors and know what they are...







- DOT Class 1: Explosives
- DOT Class 2: Gases
- DOT Class 3: Flammable combustible liquids
- DOT Class 4: Flammable solids, spontaneously combustible materials; and dangerous when wet materials/water-reactive substances
- DOT Class 5: Oxidizing substances and organic peroxides
- DOT Class 6: Toxic and infectious substances
- DOT Class 7: Radioactive materials
- DOT Class 8: Corrosive substances
- DOT Class 9: Miscellaneous



Label Your Chemicals,



- All hazardous chemicals must be clearly labeled for the benefit of current users, emergency personnel, and future users.
- Unknown chemicals can be expensive to dispose of.
- Make sure all labels are legible and in good condition.
- Repair or replace damaged or missing labels.

<u>Manufacturers' Labels Cal/OSHA requires that manufacturers provide</u> <u>labels with the following information:</u>

- Contents of the container
- Physical and health hazard information
- Name, address, and emergency phone number of the manufacturer or other responsible party

• Original manufacturers' labels must not be removed or defaced.



Your Own Labels 4



- Hazardous chemicals that are not in the manufacturer's original container must at a minimum,
- Be labeled with the contents of the container.
- If the contents are hazardous, attach a label indicating the hazard to warn individuals in the work area.
- It is not necessary to label containers that will be used temporarily (during one work shift) and are under your immediate control.





Multiple Hazard Classes 2



- Many chemicals belong to more than one chemical family or hazard class. In such cases, all storage rules must be strictly observed.
- Acetic acid is both a corrosive acid and a combustible liquid. It must be stored away from corrosive bases, such as sodium hydroxide, and also from oxidizing acids, such as nitric acid.






Transportation Marking System

- Placards
 - Placed on all four sides of vehicles
 - Identify a broad hazard class



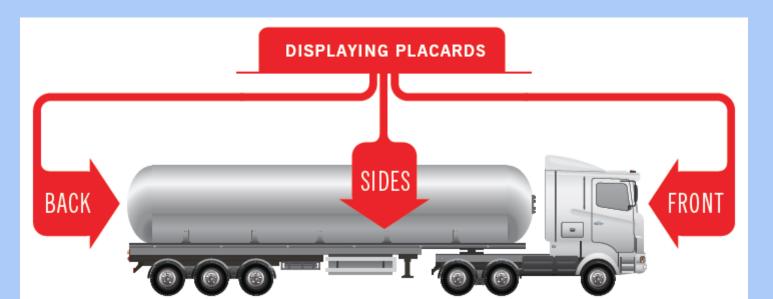



Transportation Marking System



- •Not all chemical shipments are marked.
- You may also identify hazardous materials in transport from:
 - •The bill of lading or freight bill
 - •The waybill or consist



| | /doc/shipment/billoflading/L2RlbW9mdy9hcGkvc2hpcG1lbnQvMTAwMDI=/5 | | | Q¢ | |
|--|---|--|--|-------------|--|
| | | | | | |
| ate: 10/3/2013 | BILL OF LADING | | Pa | Page 1 of 1 | |
| Big Productions 23 Main St Redwood City, CA 910 City of Orange 1891 Cassiopeia Way ancaster, CA 90812 | SHIP FROM)21 Ship to | Shipper's number: 10001 Carrier name: Big Produc Carrier's number: US DO Hazmat reg. number: 132 24 Hr. Emergency Contact Contract: AZA-123-09122 | tions LLC T #982123 1142 194 821AU | 34 | |
| | SIC DESCRIPTION httication Number, Proper Shipping Name, Hazard Class, Pac | king Group | Total Quantity mass, vol, or activity | Weight | |
| X UN EX 201 201 | UN0335, Fireworks, 1.3G, PGII EX Numbers: 2011011319, 2011013602, 2011013661, 2011015464, 2011015979, Net 2011016170, 2011016348, 2011020368, 2011020845, 2011023163, 2011024115, 2011024408, 2011026226, 2011027218, 2011036216, 201103654, 2011037259, 2011037478, 2011040388, 2011042030, 2011042108, 2011044551, 2011049519 | | 99 lb Net Explosive Mass | 247 lb | |
| | UN0336, Fireworks, 1.4G, PGII EX Numbers: 2011027382, 2011031709, 2011034488, 2011049220 Net Exc | | 12 lb Net Explosive Mass | 30 lb | |
| то | DTAL | | | 277 lb | |



SHIPPING PAPERS

3



NG PAPER

- Entry must be legible and in English
- Entry may not contain code numbers or abbreviations
- Each entry for each hazardous material must include the BASIC DESCRIPTION:
 - Proper shipping name (Column 2, Hazmat Table)
 - •Hazard class (Column 3, Hazmat Table)
 - Identification Number (Column 4, Hazmat Table)
 - Packing Group (Column 5, Hazmat Table)



SHIPPING PAPERS 7

SHIPPING PAPER



Shipping paper must:

- Contain the name of the shipper
- •Indicate multiple pages, for example "page 1 of 4".
- Show emergency response number
- Contain Shipper's Certification
- Include the total quantity of material
- Accompany the shipment (give to the driver)
- •Be readily available in driver's compartment



Shipping Info







Emergency Response Information 6



•Shippers use SDS, ERG, forms. Information must include:

Basic Description of the hazardous material

- Immediate hazards to health
- Risks of fire or explosion
- Immediate precautions in case of an accident
- Procedures in case of fire
- Methods for handling spills and leaks
- Preliminary first aid



Determining the Physical Hazard



So How do I determine the Physical Hazard of a material?

This should be your first choice

Section 9: Physical and Chemical Properties

Section 9 - Physical & Chemical Properties

- Appearance:
 Yellow liquid

 Physical State:
 liquid

 Vapor Pressure:
 185 mm Hg

 Boiling Point:
 56.1°C/133°F @ 76 mm Hg

 Solubility (H₂O):
 Negligible

 Evaporation Rate:
 Slover than ethyl ether

 Bulk Density:
 7.26 lbs/gal (liquid density)

 VOC:
 659g/L (5.5 lbs/gal) EPA protocol 24
- Odor: Solvent odor pH: Not determined Vapor Density: >1 Melting Point: Not available Specific Gravity: 0.872 @ 77°F Viscosity: Not determined Percent Volatile: 73-77





PHYSICAL HAZARDS 5





Flame Over Circle – oxidizers

Flame – flammables, pyrophorics, self-heating, emits flammable gas, self-reactives, organic peroxides

Exploding bomb – explosives, self-reactives, organic peroxides


Corrosion – corrosive to metals

Gas cylinder – gases under pressure



HEALTH HAZARDS



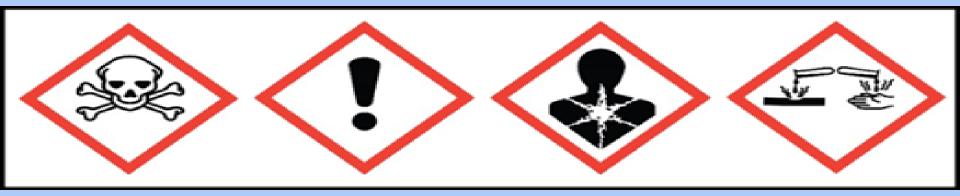

Skull and Crossbones – acute toxicity (fatal or toxic)

Exclamation Mark – irritant (skin and eye), skin sensitizer, acute toxicity (harmful), narcotic effects, respiratory tract irritant

Health Hazard – carcinogen, mutagenicity, reproductive toxicity, respiratory sensitizer, target organ toxicity, aspiration toxicity

Corrosion – skin corrosives, burns, eye damage



Transportation Info System

• <u>CHEMTREC</u>

- Operates a 24-hour telephone line
- An extensive database of chemical information
- Must have information ready when calling



How CHEMTREC[®] Helps

First Responders

1-800-262-8200



NFPA 704 LABEL



OX

FIVE NFPA HAZARD LEVELS

- 4 EXTREME
- 3 HIGH
- 2 MODERATE
- 1 SLIGHT
- 0 INSIGNIFICANT







BREAKTIME!







HAZMAT STORAGE - 101

GET YOURS! ONLY \$3 HAZMA STORAGE 101 DUMMIES THIS BOOK HANGED MY EASY HAZMA LIFE! ORACE T EVEN YOU CA UNDERSTAN **LIARANTE** TO MAKE Y SMARTER

www.txt2pic.com

The safe storage of hazardous chemicals is an essential part of an environmental, health, and safety program. Chemical storage facilities must meet certain minimum standards to satisfy diverse regulations, such as those of Cal/OSHA, the local CUPA, and the California Fire Code.





























Improper Cylinder Storage







Improper......Everything !!!!







Segregate Incompatibles 4



- Each Chemical Hazard class should be separated from all other chemical classes by an approved non-combustible partition or by a distance of twenty feet.
- Ideally, each hazard class would be kept in a cabinet or on a shelf segregated from other hazard classes.
- Incompatible chemicals within the same hazard class should also be separated from one another.
- For example, both nitric and perchloric acids are incompatible with organic acids (such as acetic acid) and should not be stored together.





Segregate Incompatibles 3



- Materials should always be segregated and stored according to their chemical family or hazard classification. <u>Do not store</u> <u>chemicals alphabetically unless they are compatible!</u>
- Accidental contact between incompatible chemicals can result in a fire, an explosion, the formation of highly toxic and/or flammable substances, or other potentially harmful reactions:
- Oxidizers mixed with flammable solvents can cause a fire. Acids mixed with metal dust can produce flammable hydrogen gas.



Segregate Incompatibles 5



- Store flammable liquids in approved safety containers in flammable storage cabinets. Do not store anything but flammable or combustible liquids in these cabinets.
- Segregate acids from bases.
- Segregate most organic acids from oxidizing mineral acids.
- Keep oxidizers away from other chemicals, especially flammables, combustibles, and toxic materials.
- Keep corrosives away from substances that they may react with and release corrosive, toxic, or flammable vapors.



Chemical

- Acetylene
- Acetic Acid
- Acetone
- Chlorine
- Hydrogen Sulfide
- Sodium Peroxide
- Mercury

Common Incompatibles Incompatible with

Copper, silver, mercury Chromic acid, Nitric acid, Ethylene glycol Concentrated sulfuric or nitric acid Ammonia, acetylene, benzene hydrogen Nitric acid, Oxidizing gases Any oxidizable substances Acetylene, Ammonia, Lithium





Storage Area Requirements,



- ✓ Label storage areas according to the type of chemical class or hazard classification found there.
- ✓ Inspect storage areas as warranted and <u>Waste areas weekly</u>.
- ✓ Keep aisles, hallways, doorways, exits, and entryways clear.
- ✓ Keep storage areas well lit, appropriately ventilated, and at a consistent, cool temperature.
- ✓ Eliminate ignition sources such as open flames, heat sources, or direct sunlight.
- ✓ Keep emergency equipment such as fire extinguishers handy and in good working order.
- Confine chemical storage areas so that leaks or spills are controlled. Prevent chemicals from running down sink, floor, or storm water drains. Clean up spills and drips immediately



Flammables & Combustibles

FLAMMABLE

Flammability is determined by measuring a substances **FLASH POINT**







•Several agencies define and classify flammable & combustible liquids

- <u>NFPA</u> <100 >100
- •<u>DOT</u> <140 >141
- •<u>GHS</u> <199.6 >199.6





Bottom Line The Fire Dept Says:

Any material having a flash point Below 100°F are called FLAMMABLES

Above 100°F are called **COMBUSTIBLES**



Just don't forget the DOT & GHS versions



Dusts can be Explosive!!



At very high concentrations and under the right conditions, some dusts can be explosive.

<u>The smaller the particle, the more reactive the dust.</u> As the materials become smaller, they disperse and remain suspended more easily, increasing the potential for ignition and propagation of the reaction.

An example is excess organic material created from dumping corn into a silo or small fibers.







Storage Precautions for Flammables and Combustibles




- Keep flammables away from all ignition sources: open flames, hot surfaces, direct sunlight, spark sources.
- Store flammables separate from other hazard classes, especially oxidizers and toxics.
- Separate flammable gases from oxidizing gases with an approved non-combustible partition or by a distance of 20 feet.
- Store flammable liquids in approved safety containers or cabinets.
- In instances where static electricity may accumulate and ignite flammable vapors, ground and bond flammable liquid containers.
- Keep a fire extinguisher (appropriate for the hazard) readily available and make sure anyone who may need to use it is properly trained.



Corrosives




Both <u>acids</u> and <u>alkalines</u> have the <u>same Corrosive Label</u>

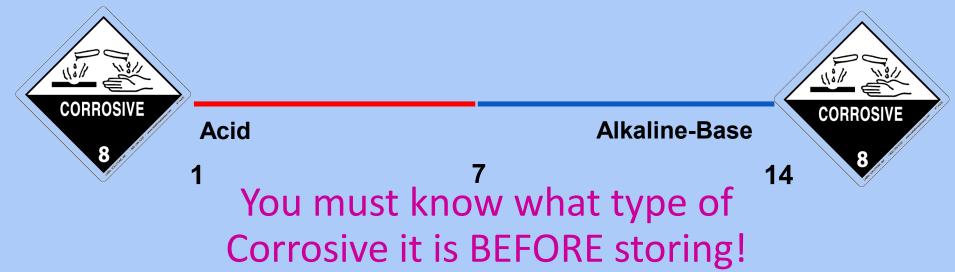

Just because they have the same label does not mean

they like each other

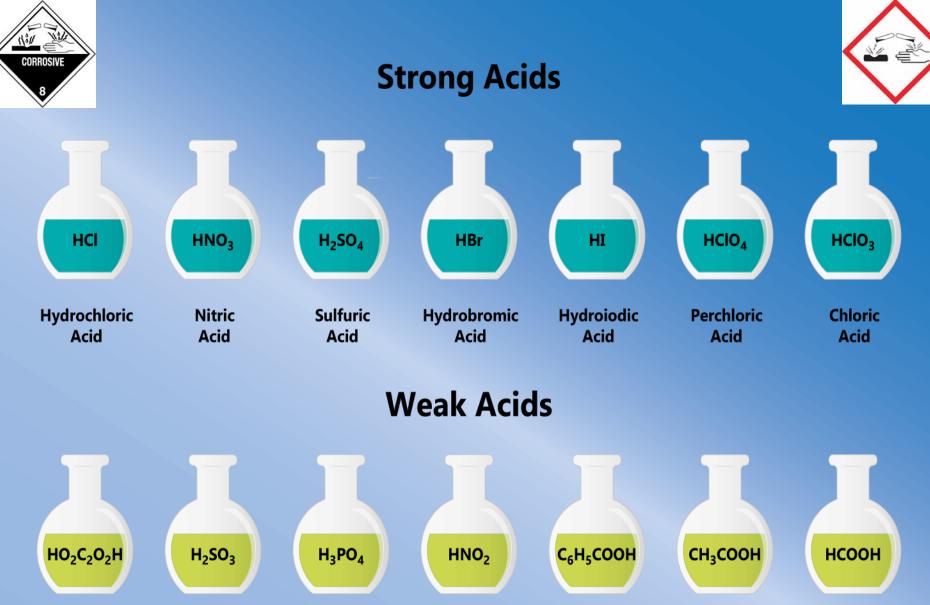

Oxalic Acid

Sulfurous

Acid

Phosphoric Acid

Nitrous Acid

Benzoic Acid



sciencenotes.org



Hazards of Strong Acids 4



- Concentrated strong acids can cause severe and painful burns.
- The pain is due in part to the formation of a protein layer, which resists further penetration of the acid.
- In general, inorganic acids are more dangerous than organic acids, although the latter can cause deep-seated burns on extended contact with skin.
- Leakage from containers and residue on the outside of a container following a sloppy transfer can cause corrosion of the shelving.



Inorganic acids 3





- Inorganic acids, also called <u>mineral acids</u> or <u>natural</u> <u>acids</u>, are acids derived from one or more inorganic compounds.
- Inorganic acids are man made.
- These inorganic acids are either oxygen-less or oxoacids. ... The inorganic acids, especially sulfuric acid, nitric acid, and hydrochloric acid, are manufactured for commercial use in large plants in large quantities.




Examples of Common Strong Bases



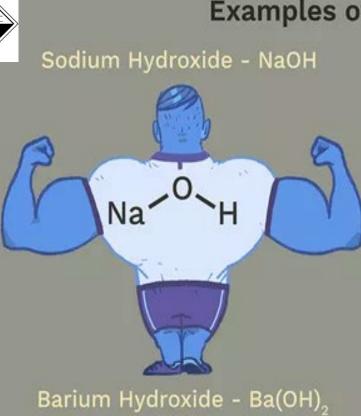


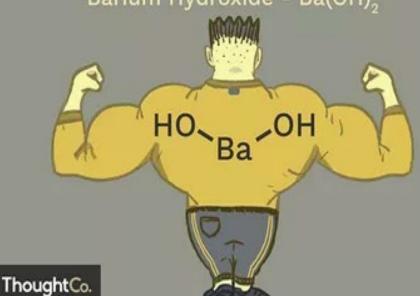

Potassium Hydroxide - KOH

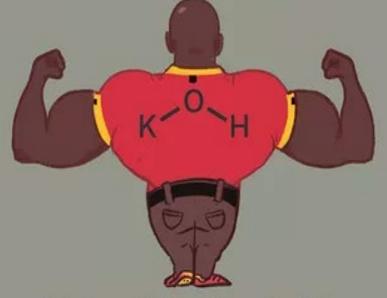

Calcium Hydroxide - Ca(OH),

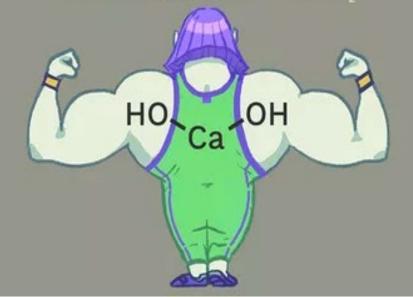



Hazards of Strong Bases 4



- Alkali metal hydroxides are very dangerous when allowed to contact tissue.
- Contact with the skin may be less painful than a comparable exposure to acid because the protective protein barrier is not formed.
- Greater damage may occur because the pain is less pronounced.
- Any area exposed to strong alkaline material should be flooded with water for at least 15 minutes. This is particularly important in eyes where exposure can result in global rupture.



Dehydrating Agents 5



Strong dehydrating agents such as

- Sulfuric acid
- Sodium hydroxide
- Phosphorous pentoxide
- Calcium oxide
- Glacial acetic acid



 Cause severe burns to the eyes because of their strong affinity to water. When added to water too rapidly, violent reactions, accompanied by spattering, can occur.



Storage Precautions for Corrosives 7



- Segregate acids from bases. Segregate inorganic oxidizing acids (e.g., *nitric acid*) from organic acids (e.g., *acetic acid*), flammables, and combustibles.
- Segregate acids from chemicals that could generate toxic gases upon contact (e.g., *sodium cyanide* and *iron sulfide*).
- Segregate acids from water reactive metals such as *sodium, potassium,* and *magnesium*.
- Use tight-fitting goggles, gloves, and closed-toe shoes while handling corrosives.
- Store solutions of inorganic hydroxides in polyethylene containers.
- Store corrosives on lower shelves, at least below eye level and in compatible secondary containers.
- <u>**Do not store corrosives on metal shelves**</u>. Although ventilation helps, chemicals will still corrode the shelves. Store containers in plastic tubs or trays as secondary containment.



Storage Precautions for Corrosives



- <u>Corrosive liquids must never be stored under sinks and may not be</u> <u>stored on shelves above eye-level.</u>
- The formation of <u>crystals and residues around the caps</u> of bottles of corrosive-liquids is an indication that the container is not properly sealed. <u>Containers that show these signs of leakage must be discarded</u> <u>as hazardous waste.</u>

Inorganic Corrosives

- Storage cabinets that are constructed of corrosion-resistant materials are the preferred storage location for most inorganic corrosive liquids. The corrosive vapors that may escape from containers of concentrated acids and bases can damage cabinets, shelves, and brackets.
- Mildly corrosive inorganic liquids such as dilute acids and bases may be stored in open shelving. <u>It is recommended that acids and bases</u> <u>stored in regular cabinets be kept on plastic trays or in plastic bins.</u>



Storage Precautions for Corrosives



- Amines The easiest way to think of amines is as near relatives of ammonia, In amines, the hydrogen atoms in the ammonia have been replaced one at a time by hydrocarbon groups.
- Amines are alkaline compounds that may be corrosive, but are generally weak bases. Amines are also commonly flammable and tend to give off strong odors. Amines do not need to be stored in a corrosion-resistant cabinet. If they are flammable, they should be kept in a flammable-liquids storage cabinet.
- Organic acids and acid chlorides
- Non-halogenated organic acids and acid chlorides <u>(such as formic acid and</u> <u>acetic acid)</u> are corrosive, but they are also flammable. These should be stored in a flammable-liquids storage cabinet. Keep the containers clean and tightly capped to avoid damage to the cabinet due to escaping corrosive vapor.
- Oxidizing acids
- Some acids <u>(such as nitric, chromic, and sulfuric)</u> are strongly oxidizing in addition to being strongly corrosive. These acids must be kept in a corrosionresistant cabinet and must be stored separately from all reducing agents, organic chemicals, and cellulose containing materials.







 Toxicology is the study of the nature and action of poisons. Toxicity is the ability of a chemical molecule or compound to produce injury once it reaches a susceptible site in or on the body.





Dose–Response Relationships 2



- <u>The potential toxicity (harmful action) inherent in a substance is</u> <u>manifest only when that substance comes in contact with a living</u> <u>biological system</u>. A chemical normally thought of as "harmless" will evoke a toxic response if added to a biological system in sufficient amount.
- <u>The toxic potency of a chemical is defined by the relationship</u> <u>between the dose (the amount) of the chemical and the response</u> <u>that is produced in a biological system.</u>





Routes of Entry into the Body 6



- There are three main routes by which hazardous chemicals enter the body:
- Absorption through the respiratory tract through <u>inhalation</u>. This is most important in terms of severity.
- Absorption or Injection through the skin or eyes.
- Absorption through the digestive tract through ingestion. This can occur through eating or smoking with contaminated hands or in contaminated work areas.
- Most exposure standards including <u>ACGIH Threshold Limit</u> <u>Values (TLVs)</u> and <u>OSHA Permissible Exposure Limits (PELs), are</u> <u>based on the inhalation route of exposure.</u> They are normally <u>expressed in terms of either parts per million (ppm) or milligrams</u> <u>per cubic meter (mg/m3) concentration in air.</u>
- If a significant route of exposure for a substance is through skin contact, the SDS will have a "skin" notation. Examples include: pesticides, carbon disulfide, phenol, carbon tetrachloride, dioxane, mercury, thallium compounds, xylene, hydrogen¹¹²



Health Effects 3



- Acute poisoning is characterized by rapid absorption of the substance and the exposure is sudden and severe. Normally, a single large exposure is involved. Examples: carbon monoxide or cyanide poisoning.
- <u>Chronic poisoning</u> is <u>characterized by prolonged or repeated</u> <u>exposures</u> of a duration measured in days, months or years. Symptoms may not be immediately apparent. Examples: *lead* or *mercury* poisoning and *pesticide* exposure.
- Local refers to the site of action of an agent and means the action takes place <u>at the point or area of contact</u>. The site may be skin, mucous membranes, the respiratory tract, gastrointestinal system, eyes, etc. Absorption does not necessarily occur. Examples: strong **acids or alkalis**.



Health Effects 3



- <u>Systemic</u> refers to a site of action other than the point of contact and presupposes absorption has taken place. For example, an inhaled material may act on the liver. Examples: *arsenic* affects the blood, nervous system, liver, kidneys and skin; *benzene* affects the bone marrow.
- <u>Cumulative poisons</u> are characterized by materials that tend to build up in the body as a result of numerous chronic exposures. The effects are not seen until a critical body burden is reached. Examples: *heavy metals*.
- <u>Synergistic responses</u> When two or more hazardous material exposures occur the resulting effect can be greater than the effect of the individual exposures. This is called a synergistic or potentiating effect. Example: exposure to both *alcohol and chlorinated solvents.* 114



Other Factors Affecting Toxicity




- Rate of entry and route of exposure; that is, how fast is the toxic dose delivered and by what means. Age can affect the capacity to repair tissue damage. Previous exposures can lead to tolerance, increased sensitivity or make no difference.
- State of health, physical condition, and life style, can affect the toxic response. Preexisting disease can result in increased sensitivity.
- Environmental factors such as temperature and pressure may also affect the exposed individual as well as host factors including genetic predisposition and the sex of the exposed individual.





Hepatotoxic

- Hepatotoxic agents cause damage to the liver.
- These include:
- carbon tetrachloride
- tetrachloroethane
- nitrosamine

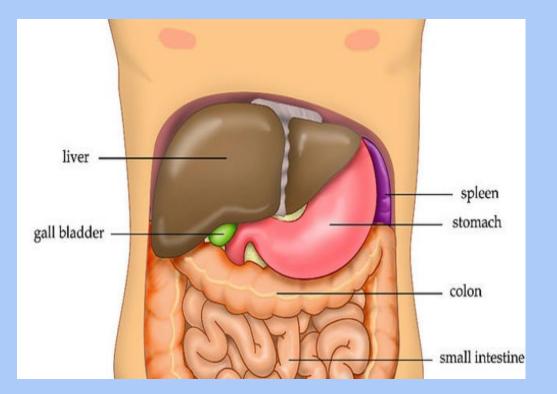







<u>Nephrotoxins</u>

- Nephrotoxic agents damage the kidneys.
- •These include:
- halogenated hydrocarbons
- uranium compounds



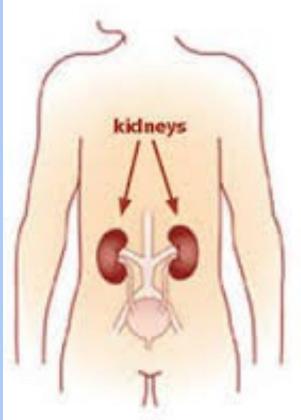






Neurotoxins

- Neurotoxic agents damage the nervous system.
- The nervous system is especially sensitive to organometallic compounds and certain sulfide compounds.
- These include:
- trialkyl tin compounds
- tetraethyl lead
- methyl mercury
- carbon disulfide

organic phosphorus insecticides

- manganese
- thallium

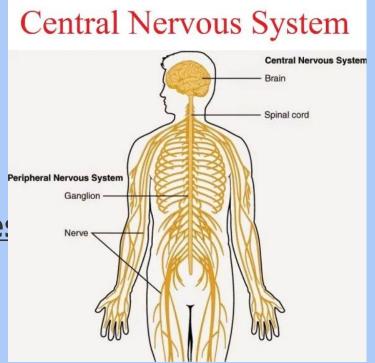






Hematopoietic Toxins

- Some toxic agents act on the blood or *hematopoietic* system.
- The blood cells can be directly affected or the bone marrow can be damaged.
- •These include:
- nitrites
- aniline
- toluidine
- nitrobenzene
- benzene

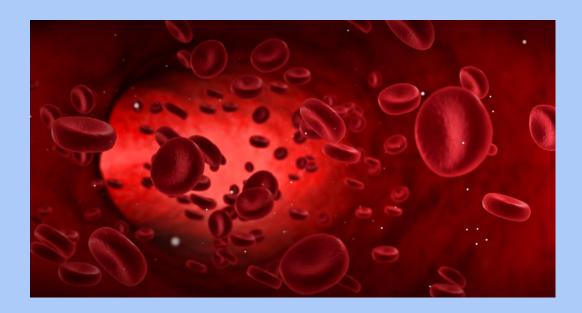



Storage Precautions for Toxics 4



- Segregate toxics from other hazard classes and store in a cool, well ventilated area, away from light and heat.
- Containers should be tightly sealed to minimize exposure to personnel and contamination of other chemicals.
- Maintain the lowest possible quantities of highly toxics.
- Segregate highly toxic chemicals from other hazard classes and store in an area that is cool, well ventilated, and away from light and heat.





Irritants ,



Chemical irritants are materials that cause reversible inflammation or irritation to a body surface, including eyes, respiratory tract, skin or mucous membranes, upon contact.

Long term exposure to irritants can result in increased mucous secretions and chronic bronchitis.

- A *primary irritant* exerts no systemic toxic action, either because the products formed on the tissue of the respiratory tract are non-toxic or because the irritant action is more severe than any systemic toxic action. Example: hydrogen chloride.
- A secondary irritant's effect on mucous membranes is overshadowed by a systemic effect resulting from absorption. These include:
- hydrogen sulfide
- aromatic hydrocarbons
- Exposure to a secondary irritant can result in pulmonary edema, hemorrhage and tissue necrosis.



Irritants 1



Common irritants include substances such as:

- ammonia
- alkaline dusts and mists
- hydrogen chloride
- hydrogen fluoride
- halogens
- ozone
- phosgene
- nitrogen dioxide
- phosphorus chloride
- arsenic trichloride





Carcinogens 1



• The term carcinogen describes any agent that can initiate or speed the development of malignant or potentially malignant tumors, malignant neoplastic proliferation of cells, or cells that possess such material.

A select carcinogen is any substance that meets one of the following criteria:

- It is regulated by OSHA as a carcinogen
- It is listed under the category, "known to be carcinogens" in the National Toxicology Program (NTP)
- It is listed by the International Agency for Research on Cancer Monographs (IARC)



Reproductive Hazards ²



 Reproductive hazards are chemicals that affect the reproductive capabilities including chromosomal damage (*mutagens*) and effects on the fetus (*teratogens*).


• A <u>mutagen</u> affects the chromosome chains of exposed cells. <u>The effect is hereditary</u> and becomes part of the genetic pool passed on to future generation.


• A <u>teratogen</u> (embryotoxic or fetotoxic agent) is an agent that interferes with normal embryonic development and may lead to birth defects or even death. <u>Effects are not hereditary</u>



Forms of Radiation



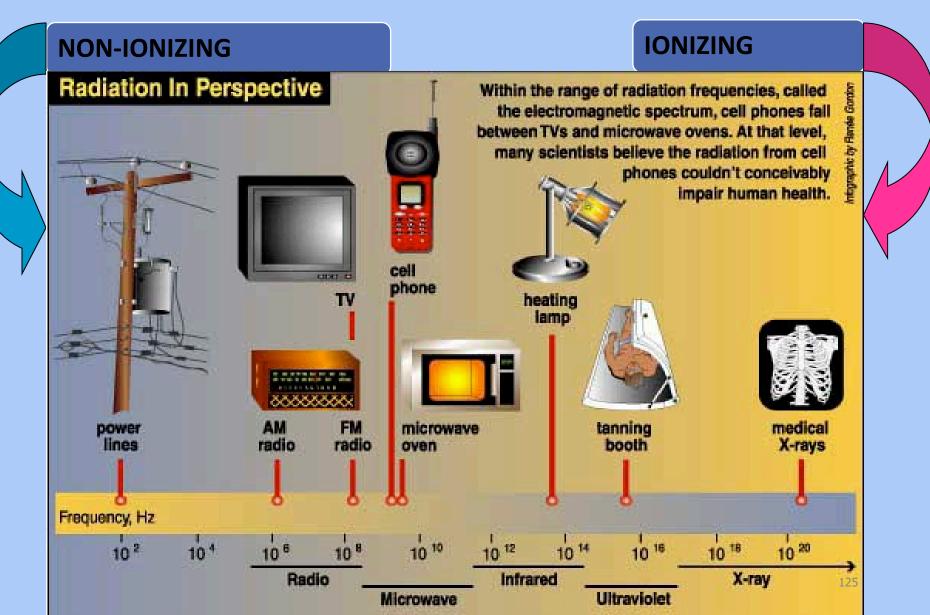

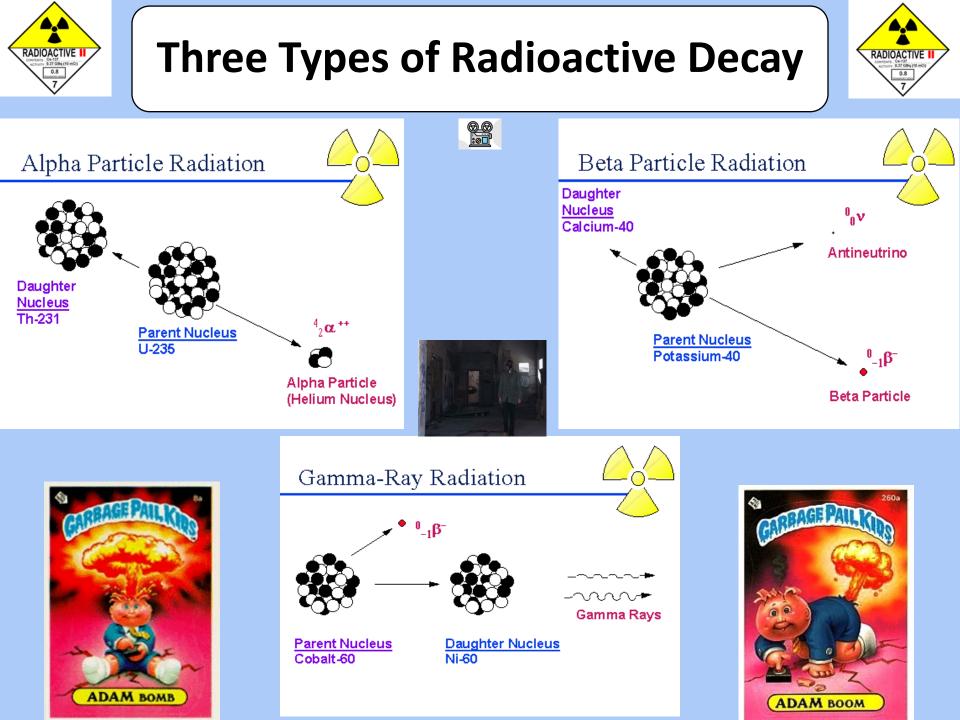





Chest radiograph,

A/P

15-25 mrem

Radiation Exposures

Chest radiograph,

lateral

50-65 mrem

1 REM = 1,000 mREMs PEL= 5 REM's/Year

Coast-to-coast flight 3 mrem Natural background 150-300 mrem

> Computerized tomography 2000-6000 mrem









OXIDIZER

Oxidizers 1

Fuel



•The primary hazard lies in their ability to act as an oxygen source, and thus to readily stimulate the combustion of organic materials



Oxidizers 2



- Oxidizing chemicals are materials that spontaneously evolve oxygen at room temperature or with slight heating or promote combustion.
- This class of chemicals includes *peroxides*, *chlorates*, *perchlorates*, *nitrates*, and *permanganates*. <u>Strong oxidizers</u> <u>are capable of forming explosive mixtures when mixed with</u> <u>combustible, organic or easily oxidized materials</u>.









Storage Precautions for Oxidizers 5



- Segregate oxidizers from flammable and combustible materials (paper, wood).
- Segregate oxidizers from reducing agents (zinc, alkaline metals, formic acid).
- Segregate inorganic oxidizers from organic peroxides.
- Take care not to contaminate oxidizers. Some oxidizers, such as *perchloric acid*, can become explosive mixtures if contaminated with trace amounts of organic materials or metals.
- Store in a cool, dry place.







Peroxide Forming Chemicals 6



- <u>Peroxide-forming chemicals are a class of materials that have the ability to form shock-sensitive and explosive peroxide crystals.</u> When triggered by friction or shock the peroxides will explode.
 Peroxide forming chemicals include <u>solids, liquids and gases</u>. These chemicals may also be flammable.3
- <u>Peroxides form after exposure to air.</u> The rate of peroxide formation is dependent on the specific chemical, the amount of air exposure and whether the chemical contains and inhibitor to retard peroxide formation.
- Class A Peroxide-Forming Chemicals-Expire 3 months after opening Class B Peroxide-Forming Chemicals-Expire 1 year after opening Class C Peroxide-Forming Chemicals-Expire 1 year after opening "Unopened from manufacturer-Expire after 18 months" 131



Compressed Gases







Types of Compressed Gas Cylinders 3



- There are three major groups of compressed gases stored in cylinders: <u>liquefied, non-liquefied and dissolved gases</u>. In each case, the pressure of the gas in the cylinder is commonly given in <u>pounds per square inch gauge (psig)</u>.
- <u>Gauge pressure</u> = Total gas pressure inside cylinder atmospheric pressure.
- <u>Atmospheric pressure</u> is (14.7 psi). Note that compressed gas cylinder with a pressure gauge reading of 0 psig is not really empty. It still contains gas at atmospheric pressure.






Liquefied Gases 6



• Liquefied gases are gases which can become liquids at normal temperatures when they are inside cylinders under pressure.

The following are Liquefied Gases

- Anhydrous ammonia
- Chlorine
- Propane
- Nitrous oxide
- Carbon dioxide

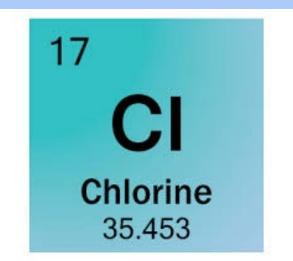




Non-Liquefied Gases 5



 Non-liquefied gases are also known as compressed, pressurized or permanent gases. These gases do not become liquid when they are compressed at normal temperatures, even at very high pressures.

Common examples of these are

- Oxygen
- Nitrogen
- Helium
- Argon





Dissolved Gases ²



- Acetylene is the only common dissolved gas. Acetylene is chemically very unstable. Even at atmospheric pressure, acetylene gas can explode. Nevertheless, acetylene is routinely stored and used safely in cylinders at high pressures (up to 250 psig at 70°F).
- This is possible because acetylene cylinders are fully packed with an inert, porous filler. The filler is saturated with acetone or other suitable solvent. When acetylene gas is added to the cylinder, the gas dissolves in the acetone. Acetylene in solution is stable





Acetylene
 Cylinders are filled
 with Calcium
 Silicate





Other Gases 5



• <u>Toxic Gas</u>

- A gas with a (LC50) in air of more than 200 ppm, but not more than 2,000 ppm by volume of gas.
- Highly Toxic Gas
- A gas with a (LC50) in air of 200 ppm or less.
- <u>Corrosive Gases</u>
- Corrosive gases cause visible destruction of or irreversible alterations in living tissue by chemical action at the site of contact

Pyrophoric Gases

• Are gases with an auto-ignition temperature in air at or below 130°F. These gases are so reactive that they can ignite spontaneously in air.

Oxidizing Gases

Oxidizing gases include any gases containing oxygen at higher than atmospheric concentrations (above 23-25 percent), nitrogen oxides, and halogen gases such as chlorine and fluorine.

Storage Precautions for Compressed Gases

- Segregate incompatible gases as you would other incompatible chemicals.
- Limit the quantity of compressed gas cylinders on site to what will be used within a reasonable period of time.
- Store cylinders upright
- An acceptable means includes using two non-combustible restraints, such as chains, one restraint located approximately one-third of the cylinder length from the top, and the other restraint one-third from the bottom.
- Keep cylinders away from heat and open flames. Leave the valve protection cap on the cylinder unless it is in use.
- If you suspect that a cylinder is leaking, do not attempt to sniff the leak out. Apply a soap solution to the cylinder and locate the leak by noting where the bubbles appear.



Chemical Reactivity



• Exothermic

• Releases heat

Oleum (concentrated sulfuric acid) will bubble, fume & heat to over 300 ° F when water is applied

• Endothermic

Absorbs heat

Ammonium nitrate mixed with water reacts by absorbing heat (for example in a cold pack making the pack as cold as 32° F)

Caution: neutralizing a corrosive spill with water creates a chemical reaction – usually exothermic and is best left to Hazmat Technicians



Pyrophorics Chemicals ₃



Pyrophoric chemicals are liquids, solids, and gases that will ignite spontaneously in air at or below 130 °F.

- Oxidation of the compound by oxygen or moisture in air proceeds so rapidly that ignition occurs.
- Many finely divided metals are pyrophoric, and their degree of reactivity depends on particle size, as well as factors such as the presence of moisture and the thermodynamics of metal oxide or metal nitride formation.





Storage Precautions for Pyrophorics,



- Store in a cool, dry place. Prevent contact with air.
- Take extreme care to prevent containers of pyrophorics from leaking or breaking. The use of corrosion- and shatter resistant secondary containers for storage and transportation of pyrophoric reagent bottles is encouraged.
- Many pyrophoric chemicals are also water reactives

Storage Precautions for Water Reactives

- Store in a cool, dry place.
- Keep away from water. In case of fire, do not use water.
- Use a dry chemical extinguisher.

Dangerously Reactive Liquids and Solids

- What are dangerously reactive liquids and solids ?
- Undergo vigorous polymerization, condensation or decomposition
- Become self-reactive under conditions of shock or increase in pressure or temperature
- React vigorously with water to release a lethal gas

Haz Mat Responders don't like anything that Polymerizes





Vigorous Polymerization 2



- Polymerization: is a chemical reaction in which many small molecules (monomers) join together to form a large molecule (polymer). Often the reaction produces heat and pressure. Industry carries out these processes under closely monitored conditions. Other chemicals (catalysts and initiators) and controlled amounts of heat, light and pressure are often involved.
- Vigorous Polymerization: is potentially hazardous because the reaction may get out of control. Once started, the reaction is accelerated by the heat that it produces. The uncontrolled buildup of heat and pressure can cause a fire or an explosion, or can rupture closed containers. Depending on the material, temperature increases, sunlight, ultraviolet (UV) radiation, X-rays or contact with incompatible chemicals can trigger such reactions

Check for this on your SDS



Vigorous Condensation



- Condensation is a chemical reaction in which two or more molecules join together to form a new substance. Water or some other simple substance may be given off as a byproduct. Some polymers, such as nylon, can be formed by condensation reactions.
- Vigorous condensation can produce more energy than the surroundings can safely carry away. This could cause a fire or explosion, or rupture closed containers.
- Some commercial products sold to be mixed for specialized applications may undergo vigorous condensation if they are not stored, handled and used as directed by the chemical supplier.



Vigorous Decomposition 4



- <u>Decomposition is a chemical change in which a molecule breaks</u> <u>down into simpler molecules.</u>
- Vigorous decomposition is potentially hazardous because large amounts of energy can be released very quickly. This could result in a fire or explosion, or rupture a closed container causing the release of dangerous decomposition products.
- Some pure materials are so chemically unstable that they vigorously decompose at room temperature by themselves.
- For example, some organics are relatively safe only when refrigerated or diluted.



Inhibitors 4



- An inhibitor is a chemical that is added to a material to slow down or prevent an unwanted reaction such as polymerization. Inhibitors are added to many materials that can polymerize easily when they are pure.
- Inhibitor levels in materials may gradually decrease during storage even at recommended temperatures.
- At storage temperatures higher than recommended, inhibitor levels can decrease at a much faster rate.
- At temperatures lower than recommended, the inhibitors may separate out. This action can result in some part of the material having little or no inhibitor




Inhibitors 3



• There are three common classes of inhibitors:

- Corrosion inhibitor: A corrosion inhibitor decreases the rate of oxidation of metal.
- Enzyme inhibitor: In chemistry and biology, an enzyme inhibitor binds to <u>an enzyme</u>, lessening its activity. Enzyme inhibitors may be reversible or irreversible.
- <u>Reaction inhibitor</u>: A reaction inhibitor is any substance that decreases the rate of a chemical reaction. Corrosion inhibitors and enzyme inhibitors are both types of reaction inhibitors. Reaction inhibitors are classified by their potency as strong, moderate, or weak.

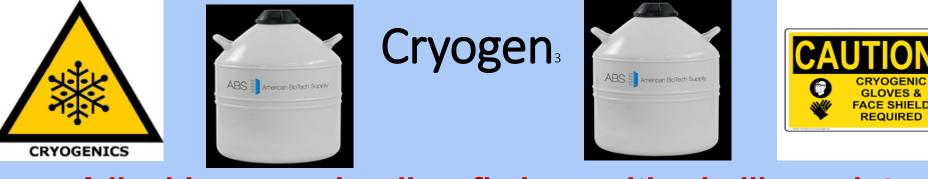

 <u>A liquid cryogen is a liquefied gas with a boiling point</u> <u>typically below (- 238°F).</u>

- The following hazards are associated with the storage, handling, and transport of cryogenic liquids and dry ice.
- Burns
- Asphyxiation
- Fire hazards
- Formation of liquid oxygen
- Pressure hazards





•<u>Burns</u>



Cryogen₃





• Even brief skin contact with a cryogen, dry ice or non-insulated equipment parts can cause cold burn and frostbite. Prolonged contact can result in blood clots. Eye contact with a cryogen or dry ice can cause permanent damage.

Asphyxiation

 Although the gases created by the evaporation of most cryogenic liquids and dry ice are non-toxic and non-reactive, they will displace oxygen in the room and create an oxygen deficient atmosphere, which may result in death.

• Remember:

• You cannot detect an oxygen deficiency or over-exposure to carbon dioxide unless there is an oxygen-monitoring device installed in the room. The inert gases are odorless and colorless. By the time you realize you are being deprived of oxygen, it may be too late!





- Lithium-based batteries, especially <u>lithium-ion</u> and <u>lithium-polymer</u> rechargeable batteries have become highly popular due to their favorable power to weight ratio and the fact that lithium-polymer batteries can be configured in various shapes and sizes.
- The most important safety consideration for lithium-ion and lithiumpolymer batteries is to treat the battery as if it will ignite at any time. Even though the odds are remote, if each battery is segregated from combustible materials during storage, charging and in use, in the rare possibility that a fire does occur, the odds are better that it will be limited to the battery itself.













Batteries are classified into two categories:



Primary and Secondary



<u>Primary batteries</u> are not rechargeable. Examples of lithium-based primary batteries are button cells and camera/smoke detector batteries. Primary batteries contain metallic lithium which reacts violently with moisture.. Water is not an effective extinguishing material for primary lithium battery fires.

<u>Secondary batteries</u> are rechargeable. Unlike primary lithium batteries, secondary lithium batteries do not contain metallic lithium. Fires involving secondary lithium-ion or lithium-polymer secondary batteries can be extinguished with a traditional ABC- type fire extinguisher or smothered with a material such as sand.









- All lithium batteries must be stored in a dedicated area clear of combustible materials.
- When more than a few lithium batteries must be kept within a given area, they should be stored in a vented metal flammable liquids or metal acid storage cabinet that is strictly dedicated to the storage of lithium batteries.
- No other hazardous or combustible materials shall be stored in or on the cabinet.
- The cabinet should help to contain a battery fire within the cabinet and prevent spread to the building or contents.
- The cabinet vents must be kept open to allow fire-generated gasses to escape.
- Label the outside of the cabinet to indicate that it contains lithium batteries.







- Inspect all batteries at least weekly. Any batteries with damaged or swollen casings must be segregated from other batteries and combustible materials and placed in a safe location.
- Never charge batteries unattended.
- Never charge batteries inside vehicles.
- Charge batteries individually. Do not charge in parallel.
- Place LiPo batteries in a lithium battery safety bag/container while charging.
- Designate a charging area. The area must be free of combustible materials and preferably located under a sprinkler head. This also applies where charging takes place while traveling or otherwise away from the laboratory.
- Maintain as much space as possible between charging batteries to avoid fire propagation between batteries.





Secondary Storage Considerations: Chemical Segregation

- Within each primary storage location (shelf, cabinet, etc.) incompatible materials may not be stored together without appropriate segregation.
- Do not segregate chemical classes into separate rooms unless they will only be used in that room.
- Segregation that disrupts normal work flow or requires more frequent transport of chemicals between work areas will increase the probability of a chemica







Secondary Storage Considerations:

- Incompatible materials should be stored in separate cabinets whenever possible.
- For example: Acids and bases would be kept in separate corrosive liquids storage cabinets.
- However, when that is not possible, secondary containment bins can be used to segregate the incompatible materials.
- The secondary containment must be large enough to accommodate the volume of the largest container stored within.
- Once separated into hazard classes, chemicals may be stored alphabetically or by chemical classes, chemicals may be stored.







Secondary Storage Considerations: Chemical Segregation

Segregation of Solids

- Segregate solid chemicals from liquid chemicals.
- Keep the following classes of solid chemicals segregated from each other in separate cabinets or secondary containers.
- oxidizing solids
- flammable solids
- water reactive solids



Secondary Storage Considerations: , Chemical Segregation • Segregation of Liquids

- Segregate liquid chemicals from solid chemicals.
- Keep the following classes of liquid chemicals segregated from each other in separate cabinets or secondary containers.
- acid liquids
- alkaline liquids high ph
- oxidizing liquids
- flammable or combustible liquids
- pyrophoric & water-reactive liquids





Secondary Storage Considerations: <u>Chemical Segregation</u> • Segregation of Compressed Gases

- The following compressed gas types must be stored separately from each other:
- Toxic gases
- Flammable gases
- Oxidizing gases*
- Empty cylinders must be stored separately from full or partiallyfull cylinders
- Oxidizing gas must be separated by a distance of at least 20 feet from fuel gas cylinders or a highly combustible material such as, but not limited to, oil, grease, flammable gas or a source of ignition, or be separated from the material by a noncombustible wall, not less than five feet high, having a fire resistance rating of one hour. All cylinders shall be stored away from heat in excess of 125° Fahrenheit.




To Vent or not to Vent ?



- Not required but..
- If vented vent to outdoors.....IF ALLOWED
- If not vented leave bungs IN





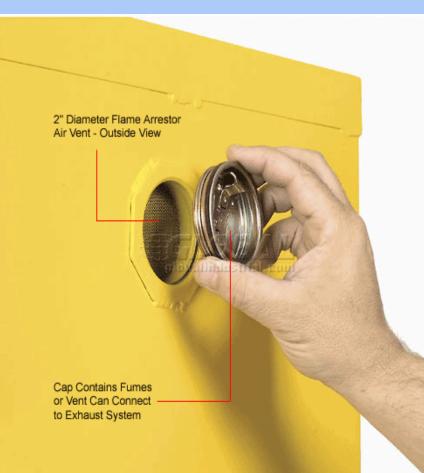

Secure the Cabinet as Warranted





BREAKTIME!





Spill Control and Containment



Hazardous Waste Operations and Emergency Response

29 CFR 1910.120(q)













Act or process of containing and/or preventing the expansion of a substance.

Purpose:

- Prevent contaminating surrounding areas
- Prevent material entering sewers or waterways
- Reduce contamination of adjacent chemicals
- Reduce extent of hazard to human life





Loss of Containment 4



Factors contributing to the loss of containment include:

- Mechanical damage,
- Thermal damage,
- Chemical reactions in the container.

Loss of containment requires proper response!









Proper Response Steps ,



- Identify spilled material
- Size-up incident severity
- Determine mitigation methods
- Implement methods



Precautions taken to minimize exposure:

- Proper size-up of situation
- **Proper PPE**
- Understanding hazards of materials involved
- Physical state of release and resulting complications.



Response Actions 4



Goals of spill response are to:

- 1. Eliminate additional loss.
- 2. Prevent further contamination.



- 3. Avoid unnecessary exposure of workers.
- 4. Prevent contact with other chemicals.





Proper Response Steps




<u>Always follow your employers Standard Operating Procedures</u>



- <u>S</u>Safety for yourself and others
- <u>I</u>Isolate and deny entry
- <u>N</u> Make proper Notifications



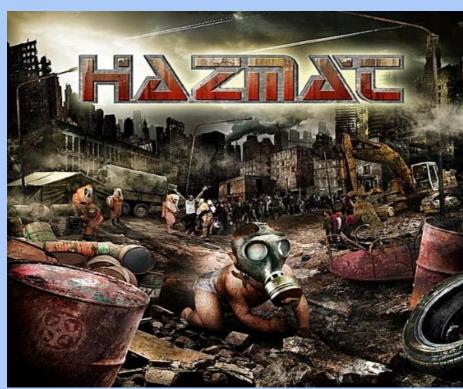



Solid Release



- Solid materials are easy to recover if kept dry and air movement is minimized. Once wet or damp, adverse reactions may complicate containment.
- Cover with compatible material to minimize spread.





Liquid Release 3



- Complicated by amount of spilled material and inherent characteristics.
- Vapors on surfaces or confined areas may form flammableexplosive-toxic levels and displace O2.
- Terrain may aid spread; liquids follow the path of least resistance to storm drains, sewers or waterways.





Gas Release



Often compartments can not be tightly sealed. In engineered facilities, this attempt to "seal" the location is achieved to some degree by shutting-down ventilation and air exchange systems.





Mitigation Techniques 2



The method by which a substance, once released, is controlled by entry personnel. These are:

- 1. Chemical Control and or Physical Control
- 2. Sometimes you can just tighten the cap on the container.









Chemical Control



Neutralization:

Mixing an acid with a basic material or base with an acid to return their pH levels toward a reading of 7 (neutral).







Physical Control



- 1. Remote shut-offs
- 2. Vapor suppression fog covering, cooling cylinders
- 3. Absorbents
- 4. Damming
- 5. Diking
- 6. Diverting
- 7. Transferring
- 8. Transfilling
- 9. Plugging and patching

10. Booming and damming on waterways.





Remote Shut-Offs



These exist to shut down processes or pipe-runs to secure product flow. Use flow diagrams in your pre-plan and know the location of these shut-offs prior to an emergency.

Be aware of critical shutdown procedures











Vapor Suppression



Cooling Cylinders.





Absorbents-Booms-Pads



Materials in a solid or granular form which can absorb a certain volume of a spill on a pound-per-pound basis. <u>Remember they</u> <u>need to be retrieved and disposed of as hazardous waste</u>.









10.000.000.000













Protecting Drains



Control/removal considerations can be as particular as using sand in plastic bags for diking material rather than loose sand.





Transferring



Removal of product from its damaged containment to another containment or container. Possible hazards:

- Characteristics of the material being transferred
- Possibility of spillage
- Vapor production
- Electrical ignition hazard
- Bonding and Grounding





Plugging and Patching



Plugging and patching is the use of compatible materials applied to the container to result in either a temporary or permanent seal at the point of damage.













- These can be specific by industry. There are also pipe sleeves which can be used for breeched piping.
- Transportation industry may use the following:









Overpacking




- Placing leaking or repaired container into a larger vessel
- Overpacks may be made of steel or plastic.








Dangers of Confined Spaces And Why Hazardous Materials Are A Big Concern

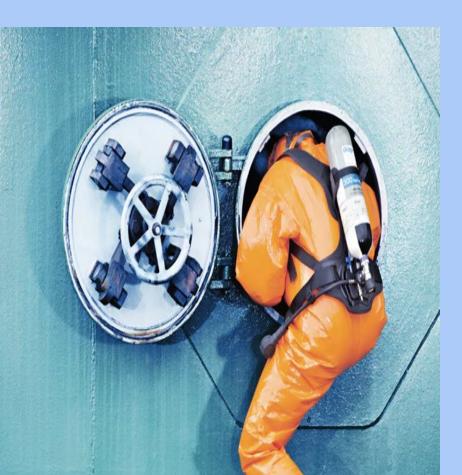

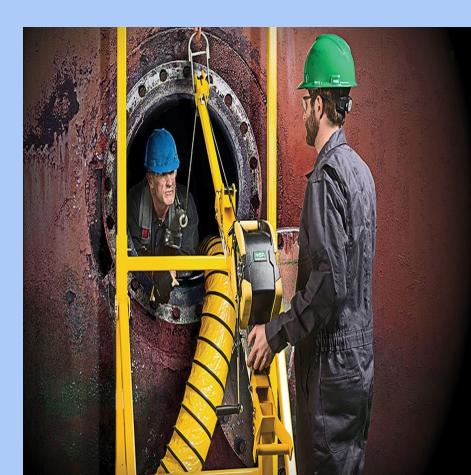





Research reveals interesting facts regarding the causes of deaths in confined spaces

- <u>65% hazardous atmospheres</u>
- 13% engulfment
- •7% struck by falling objects
- •6% heat stress/exposure
- •4% other







- COMMON CAUSES OF CONFINED SPACE ACCIDENTS 1-2 4
- Financial Motivation: Time is money and money is time.
 Supervisors and their employees will often cut corners on safety in order to save time.
- <u>Assessment Deficit</u>: Not performing or inadequately performing a hazard assessment.
- Inadequate PPE: Not using proper personal protective equipment.
- <u>Lack of Training</u>: Uninformed and uneducated workers will make poor decisions that can cause accidents.





COMMON CAUSES OF CONFINED SPACE ACCIDENTS 2-2 3

- <u>Underestimating the Environment</u>: Many of the hazards associated with confined spaces cannot be seen. Workers will often underestimate the confine space environment and are injured by hidden hazards.
- <u>Routine Operation Syndrome</u>: Thinking that the space is safe today because it has not resulted in injuries during previous entries.
- Equipment Failure: Improper maintenance, abuse, lack of backups, and equipment use that has not been mastered can all lead to accidents.



What is a Confined Space?

 Large enough that an employee can enter and perform assigned work.



 Has limited or restricted means for entry or exit.

 Not designed for continuous employee occupancy.



Confined Spaces Made Easy





Two Types of Confined Spaces



There are basically two types of confined spaces:

Non-Permit Confined Spaces
 Permit-Required Confined Spaces



NON-PERMIT CONFINED SPACE AUTHORIZED PERSONNEL ONLY







Non-Permit Confined Spaces

Non-Permit Required:

"Does not contain or with respect to atmospheric hazards, have the potential to contain a hazard capable of causing death or physical harm."





Permit-Required Confined Space 4



OContains or has the potential to contain a hazardous atmosphere

OContains a material that has the potential for engulfing an entrant

Internal configuration that might cause entrant to be trapped or asphyxiated by inwardly converging walls or floor that slopes downward and tapers to a smaller cross section

OContains any other recognized serious safety or health hazard



Alternate Entry Spaces 3



- Regulations allow permit-required confined spaces to be re-classified as a alternate confined space
- If the only hazard is a hazardous atmosphere that can be eliminated or controlled by use of a ventilation fan.
- If the space has been re-classified then you can use an alternate entry procedure.









•60% of the workers who perish in confined space accidents are rescuers who lack the necessary training & equipment.







Rescue

- An employer who designates rescue and emergency services, has several responsibilities. These include:
- Evaluate a prospective rescuer's ability to respond to a rescue call in a timely manner
- Evaluate the rescue service's ability to perform the tasks associated with rescuing employees from permit spaces
- Select a rescue team that can reach the victim(s) in a time frame that is appropriate to the hazards present





Rescue


- □ If the employer decides to use an in-house rescue service, the following requirements have to be met.
- Provide employees with personal protective equipment and train them in how to use the equipment
- □ Train employees to perform assigned rescue duties
- □ Train employees in basic first aid and CPR
- □ Ensure that employees practice making permit space rescues at least once every 12 months from the types of spaces that are present at the facility





Kescue DUTIES OF HOST EMPLOYERS

- If the employer decides to use an off-site rescue service, arrangements must be made in advance. In other words, <u>the host employer cannot assume that a</u> <u>fire department will automatically provide the service</u>.
- The agreement does not have to be in writing.
- Unfortunately, many employers may assume that they can rely on the fire department for assistance without contacting them in advance. This assumption can lead to trouble if the fire department is not prepared to respond to confined space rescues.

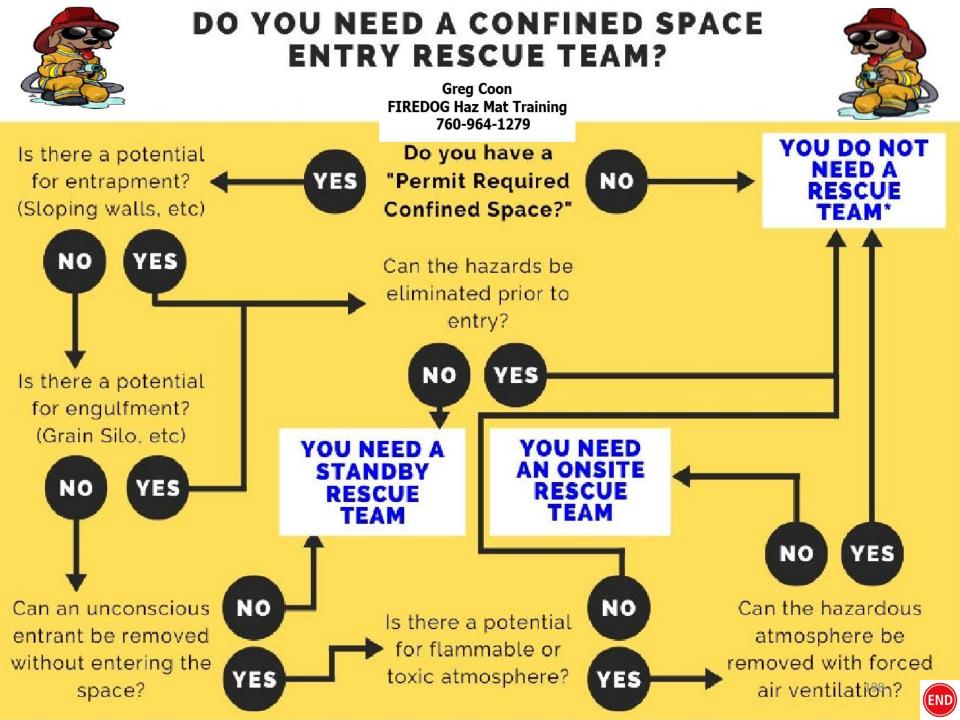



Emergency Response Zones



Hazard Control Zones Wind Direction Command Hot Zone (Exclusion Zone) Decon Post (Contamination Reduction Zone) Cold Zone (Support Zone)

- Hot Zone
- Warm Zone
- Cold Zone



Hot Zone 4



Area immediately surrounding and including the contaminated area. Greatest hazard to life and/or property is located here.

When identifying this zone, view:

- Wind direction and speed
- Topography of land
- Ventilation systems
- Potential for release increasing





Warm Zone



Area immediately surrounding the hot zone. This is the area where decon is performed.






Cold Zone 4



- Immediately surrounds the Warm Zone. This is also a buffer zone to insure a safe barrier is maintained around the release.
- Personnel in this area generally are not required to wear PPE. Located in this zone:
- Command Post and Incident Commander
- Support Services and Agencies
- Staging Area for resources



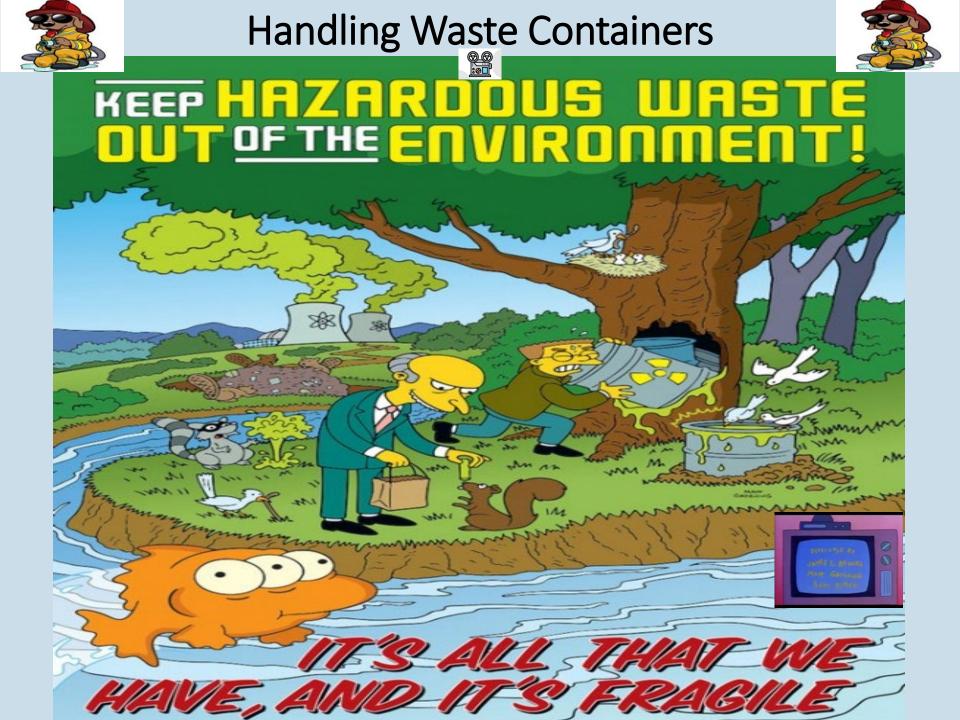



Hazardous Waste Labels & Manifest







| CA. WASTE NO. | / | ZIP | DN |
|----------------------|-------------|------------------|---|
| CA. WASTE NO. | | ACCUMULATIO | DN . |
| CA. WASTE NO. | | ACCUMULATIO |)N |
| | | | |
| | | | |
| RDOUS PRO RROSIVE | | | |
| PPING NAME / | AND UN OR I | NA NO. WITH PREF | ix. |
| IE W | ПТН (| CAREL | |
| | PPING NAME | PROSIVE REACTIN | PROSIVE PREACTIVITY DOTHER PRING NAME AND UN OR NA NO. WITH PREF |

.........

| 101142340015 | 1 General & Roman | 1 Page 1 a | 1 Despery larger | alles . | 1.849 | interna for | - | |
|--|---|---|---|---------------|-----------------|------------------|--------------------|---|
| NASTE NAMPEST | and a second sec | | Second in such | a di Manani | - | - | | _ |
| | | | | | | | | |
| Bracketh Rom | | | | | 85.5%4 | - | | |
| Teraine J Graves & | - | | | | 11.044 | - | | - |
| Employed Tarih home | of Dr. Addisor | | | | SLEN. | 1.454 | | |
| and the second se | | | 1 144 | | i | | | |
| 5. Non-Stephy No. | e addaequa | | 1.00 | 1.744 | 11 SAA | 12. Ed. Wolwi | | |
| 4. | | | | | | | | |
| | | | | | | | | |
| 1 | | | | | | | | |
| | | | | | | 1.0 | | |
| F., | | | | | | | | |
| | | | | | | | | |
| • | | | _ | | | | | |
| | | | | | | | | |
| n de la companya de la | n pi latin nega | | | - | | | | |
| n gemante konten | d Later and the local science | that the particle of the paragraphic product the transport and only in any | Les Music pouriers | and the state | ch fe pape : | | uer en susteil ver | |
| | et i commentario i suose and de constante d'aspecta i paper l'aprimen | and a fail terms and of a sec | dents interdent ord a System | des pers | in the paper of | | | |
| i contracto contra actor anticontra actor anticontra actor a | | | byoint training and a | and the state | 2.5440 | | | |
| Serrar & Korran Serrar & Korran Serrar & Serrar Serrar & Serrar Serrar & Serrar Serrar & Serrar | H COTTOUTOR Investment for an a dimensioner for the second second second for the second second second of and a second second second second and the second se | | byoint training and a | des per | 25.94 | | | T |
| | et attendetet sowij was de activitet attendet attendet spectrum distant distant et attendet attendet we | | nanto interativa vel e ligatum 1923 - Daniel Istin in Iganum | des per | 2 began | | line or | T |
| | et attendetet sowij was de activitet attendet attendet spectrum distant distant et attendet attendet we | | n die Hendelse of e System 1932 – Anne 1946 is | des per | 2732 | | line or | T |
| n octorette foormen media en doren per en de la conservationet formet de la conservation la conservation de la conserva- tionette de la conservation de la conservation de la conservation de la conservation | A LOUIS AND | | a da mandard ed a Dysten 111 - Antol Ion a Sporten | des per | era ej de | | | T |
| n octorette foormen media en doren per en de la conservationet formet de la conservation la conservation de la conserva- tionette de la conservation de la conservation de la conservation de la conservation | A LOUIS AND | | nanto interativa vel e ligatum 1923 - Daniel Istin in Iganum | des per | 20 yrs | | line or | T |
| Serveral A for the main endorspice control of the server in the server interface in the server interface in the server interface in the server interface interface interface interface Serveran | et control foot howy and the second report page for the second report page at the second report of the second test and test and test and the second report of the second test and the second report of the second report of the second test and the second report of | | a da mandard ed a Dysten 111 - Antol Ion a Sporten | des parts | Drees | | | T |
| Serveral A for the main endorspice control officer (File) Andreas Reports (File) Andreas Reports (File) Angele Astronomy (File) Angele (File) Angele (File) Angele (File) Angele (File) | et control foot howy and the second report page for the second report page at the second report of the second test and test and test and the second report of the second test and the second report of the second report of the second test and the second report of | | nan in de | des parts | era ej de | | | T |
| Science of the second se | | | nan in de | des parts | Drees | | | T |
| Science of the second se | | | nan in de | des parts | Drees | | | T |
| Science of the second se | | | nan in de | des parts | Drees | | | T |
| Andread and Calego and | A Comparison of the second sec | | ange mandred of a large system system system ligneren ligneren andres biosen | des parts | Drees | | | T |



| WERSAL | | | | | |
|--|--|--|--|--|--|
| UNIX WASIE | | | | | |
| GENERATOR INFORMATION (Optional) SHIPPER | | | | | |
| ADDRESS | | | | | |
| CONTENTS | | | | | |
| ACCUMULATION START DATE | | | | | |
| UNIVERSAL WASTE | | | | | |





| | Search Charter | 124 | 1012 | ages laper | | Liter | Taking Some | |
|--|-------------------------------|--------------------|-------|------------------|--------|---------------|-------------|---|
| NASTE NAMETEST | | | - | the's like Addre | | | | _ |
| | | | | | | | | |
| (second b from | | | T. | | | | | |
| | | | | | | 45,0%4 | | |
| T. Transistion J. Company, Name | | | | | | 11.044 | 1.000 | |
| A Designable Facility Name and Dis | Admini | | | | | SI.ON | 1.454 | |
| | | | | | | | | |
| Judg's New | | | | | | 1 | | |
| 1. Non-State have and | No. of Concession, Name | | | 16.0# | L fair | Distant Basel | 12.54R | |
| 4. | | | | | - | | 1.1.1 | |
| | | | | | | | | |
| 8 | | | | | | | | |
| | | | | | | | | |
| 5) | | | | | | | | |
| | | | | | | | | |
| • | | | | | | | | |
| I have been provided as | Contraction of the local data | | | | | | | |
| | Deeress. | abenti Mary Dae | Dynam | Note | | - berger | | 1 |
| C. Sangaria Astronomyour of Sangaria - Sangarigan Sang Tangaria - Sangarigan Sang | | | Span | | | | | |
| Tangata (Pasal parties) Tangata (Pasal parties) T. Jangata | | | Spece | | _ | _ | | - |
| Tangana i Masal garilara Tangana i Masal garilara | Dum | Dip | 1 | | _ | Dieses | - | - |
| Congress - Headingson Series Tempolar - Prince Paper Series - C. Stangares - The Series and Series Series | C.C.MA | Dip | | () basis | | | | |
| Tongate Print garbar Tongate (Print garbar 1) Inners To Dongan Adult form | C.C.MA | □1 ₂ 9 | | | | - | | |
| Internet Production for Temperature Print Production The December College of Sector | | □1 _P | | | | | | |
| Sangaria - Manifestarian Sangaria - Manifestarian - Sangaria - Malay Indonesia - Sangaria - Malay Indonesia | | □ t _p e | | | | | | |



TOP 12 HAZARDOUS WASTE GENERATOR VIOLATIONS 6



- Separate incompatibles
- Training
- Open Container Violations



- Satellite Collection Storage Area Accumulation Date Violations
- 90 day Violations
- Universal Waste Management



TOP 12 HAZARDOUS WASTE GENERATOR VIOLATIONS 6



- Failure to Make a Waste Determination
- Adequate Aisle Space

- tions of Hazardous Waste Storage
- Failure to Perform Weekly Inspections of Hazardous Waste Storage Areas
- Contingency Planning Violations......CERS
- Marking and Labeling of Containers



Not having, or having inadequate, hazardous waste manifests



Hazardous Waste Management 3



- If your business has been identified as a generator of hazardous waste and/or universal waste, you must follow federal and state hazardous waste laws.
- The intent of these laws is to ensure that hazardous waste is properly managed to protect public health and the environment.

• <u>The local Certified Unified Program Agency (CUPA), is</u> responsible for implementing these laws and regulations at

the local level.







Hazardous Waste Manifests 4



- <u>Hazardous waste transported for disposal or treatment must be accompanied</u> by a Uniform Hazardous Waste Manifest form:
- The Federal Uniform Hazardous Waste manifest consists of 6 white pages.
- The Federal manifest does not include a generator copy for submission to the State Department of Toxic Substances Control (DTSC).
- A generator must make a legible photocopy of the manifest and mail it to DTSC within 30 days of shipping the waste.
- (The top page will make a clearer copy than the bottom page, so consider making a copy before the transporter leaves with the manifest.)



Hazardous Waste Manifest System 2



- When completed, the form contains information on the type and quantity of the waste being transported, instructions for handling the waste, and signature lines for all parties involved in the disposal process. <u>Each party that handles the waste signs the</u> <u>manifest and retains a copy for themselves</u>
- This ensures critical accountability in the transportation and disposal processes. Once the waste reaches its destination, the receiving facility returns a signed copy of the manifest to the generator, confirming that the waste has been received by the designated facility.

| Cardery Roy of Sector | line line | Tringit No. | 0.00 | 100.00 | | 10 an 10 an |
|--|-------------------------------|-----------------------|---------|------------|------------|------------------------|
| NOT THE OWNER | | | | - | | |
| Palarmane. | | | | 1.000 | | |
| The second second | | | <u></u> | la sia | - | |
| Negres . | | | 2.5 | 122 | | |
| B. LI I BY Sputh And The Heat Heat Sole 1 entitletig face (Hy) | | | 1.00 | Color. | 1227 | |
| | | | | | 1.1 | |
| i verste en | | 1. | | | | |
| : · · · · · · · · · · · · · · · · · · · | | | | | T | |
| | | 1.1 | | 100 | | |
| TALE VALUES AND ADDRESS OF TALE | | anning anning | k | hoisiyan | designable | |
| | | | | | | |
| newsening Descet | controls instant an effect of | and a local diversion | - | - | | , , . |
| An officer of the second | | and a local diversion | - | - | | 2000.0 1717 1717 |
| | | and a local diversion | - | - | | |
| | | and here | - | - | | |
| | | and here | - | | | т. сіс |
| | | and here | - | ter Dur | | т. сіс |
| | De- | and here | - | ter Dur | | т. сіс |





- Any person who transports hazardous waste in a vehicle must have a valid registration issued by DTSC in his or her possession while transporting the hazardous waste.
- The registration certificate must be shown upon demand to any representative of DTSC, any representative of a Certified Unified Program Agency (CUPA), officer of the Department of the California Highway Patrol (CHP), any local health officer, or any public officer designated by DTSC.





Uniform Hazardous Waste Manifests Violations₂



 While thinking "out of the box" metaphorically might be good for your entrepreneurial endeavors, it can get you literally into trouble with the EPA. For example, failing to stay within the lines while filling in those little boxes on a Uniform Hazardous Waste Manifest can cost you.

No, we're not kidding

 Inspectors are task to enforce rules.. So if you enter a perfectly correct number, but it isn't positioned just so, you can get a \$25 fine per instance.

| 10. Containers | | 11. Total | 12. Unit | 13. Waste Codes | | | |
|----------------|------|-----------|----------|-----------------|-----|--|--|
| No. | Туре | Quantity | Wt./Vol. | | | | |
| 3 | DM | 1.00 | G | D001 | 214 | | |
| 1 | CF | 3.00 | P | | 352 | | |
| 5 | DM | 5.00 | P | | 214 | | |
| | | | | | | | |

Believe it or not. This out-of-alignment entry is good for 2 counts of a \$25 fine.

Uniform Hazardous Waste Manifests Violations

- **Expired EPA ID**. One of the most frustrating gaffes is finding out that your EPA ID has expired, which can happen if you fail to complete the required EPA Biennial Waste Report.
- Inaccurate container and quantity counts. Inaccuracies will likely bring you bureaucratic scrutiny
- Erroneous waste codes. It might just be a bookkeeping error to you, but to the EPA it's the mislabeling (and thereby misidentifying) of a hazardous waste.
- Wrong units of measure. Use of decimals or fractions when listing total weights in Item 11 is a no-no, which is why the offending entry would merit two fines @ \$25 each—not just one.
- Unauthorized signatures. The person who signs your manifest must be qualified to do so.
- Mismatched dates, transporter names, and/or EPA IDs. Dates specific to a shipment of hazardous waste must be consistent across all paperwork.

What's Your Responsibility When Signing The Manifest ²

- When you sign a hazardous waste manifest, you certify that the materials listed on the manifest are properly classified, described, packaged, marked and labeled, and are in proper condition for transportation according to the applicable regulations of the DOT.
- <u>Therefore, because the person that signs the manifest is</u> responsible for its accuracy, that person is classified as a *hazardous material employee* by the DOT. Hazardous material employees, including those participating in pre-transportation functions, must be trained per <u>49 CFR 172 Subpart H</u>





Containers 2



- Vessel or receptacle that holds a material
 - Type, size, and material can provide clues about the nature of the substance inside.
 - Often there is no correlation between the color of the drum and the possible contents.





Bulk Storage Vessels-Tanks



- Found at facilitys that rely on and need to store a large amount of a particular chemical
- Secondary containment is a method to control spills.











Bulk Storage Vessels



- Large volume horizontal tanks
 - Above-ground storage tanks
 - <u>Underground storage tanks</u>
 - Can hold a few hundred gallons to several million gallons of product







Bulk Storage Vessels

•<u>Totes</u>

- Hold 119 to 703 gallons
- Portable plastic tanks surrounded by metal cage or made from stainless steel/aluminum
- Can contain most types of chemicals









Intermodal tanks

- Hold 5,000 to 6,000 gallons
- Pressurized or non-pressurized
- Usually shipped, stored, and returned to the shipper





Drums





Although oil is sometimes shipped in 55 US gallon drums, the measurement of oil in barrels is based on the 42 US gallon¹8





•<u>Drums</u>

- Barrel-like containers
- Store a variety of substances
- The nature of the chemical dictates the construction of the drum.







Drum Facts 4



- England uses a 44-gallon drum.
- Iron Clad Manufacturing Company of New York, received two patents in December 1905 that would lead to the modern 55-gallon steel barrel.
- Use of 55 gal drums became widespread in World War II
- The measurement of oil in <u>barrels</u> is based on the 42 gal <u>whiskey</u> barrels of the 1870s









• Bags...... Small to 1 ton Super Sacks

- Used to store solids and powders
- Constructed out of plastic, paper, or plastic lined paper.
- Pesticide bags must be labeled with specific information.









•<u>Carboys</u>

- Transports and stores corrosives and other chemicals
- Holds 5–15 gallons









•Cylinders

- Hold liquids and gases
- Uninsulated compressed gas cylinders store various substances.
- Sizes vary.








BREAKTIME!





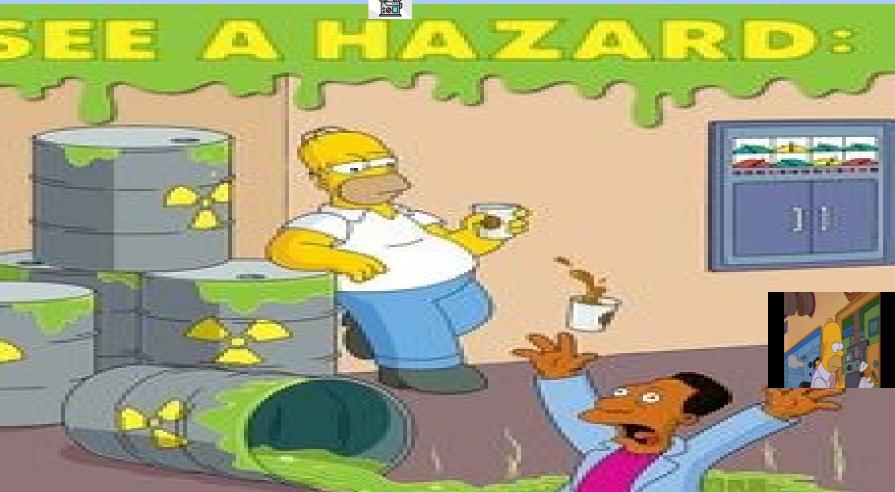









- <u>Safety</u> is the condition of being secure from personal injury and property damage. *Safety is* when there are no accidents.
- <u>Accident</u> is an undesirable, unplanned event that may result in personal physical harm or *death*. Damage to property, or disruption to business.
- <u>Near Miss</u> incidents where no property was damaged and no personal injury sustained, but where, given a slight shift in time or position, damage and/or injury easily could have occurred.







Safety Hazards



Vehicles and heavy equipment create hazards for all emergency response personal and on-site workers.

5

- # Be seen ,wear visible clothing.
- # Listen for back up alarms.
- # Beware of slopes and excavations.
- # Block wheels and set brakes.
- # Watch for rotating equipment.







Types of Hazards



Kinetic (Mechanical)

- Striking or struck-by (heavy equipment)
- Caught or caught-by (machine guarding or pinch points)

Thermal

- Fires or explosions
- Hot / Cold environments

Electrical

Faulty wiring or downed poles







Types of Hazards

Chemical

Toxic, Reactive, Ignitable, Corrosive

Biological

- Poisonous plants and animals
- Disease producing organisms

Radioactive

Ionizing or non-ionizing





General Safety Issues



Tailgate/Toolbox **safety meetings** are held to keep employees alert to work-related hazards and prevent injuries.

Tailgate or Toolbox **meetings** must address the specific hazards and **safe** work practices for the work tasks that employees are actually performing







Personal Safety Issues 5



- **1.Be Aware of Your Surroundings:** Know the particular hazards of the workspace to avoid potentially hazardous situations.
- **2.Keep Correct Posture To Protect Your Back:** If you work at a desk, keep your shoulders in line with your hips to avoid back problems. Lift properly, avoiding stooping and twisting.
- **3.Take Regular Breaks:** Many work-related injuries occur because a worker is tired, burned out and not alert to their surroundings. Regular breaks help you stay fresh on the job. One trick to staying alert is to schedule the most difficult tasks when your concentration is best, like first thing in the morning.
- **4.Use Tools And Machines Properly:** Take the proper precautions when using tools and never take shortcuts, which is a leading cause of workplace injury.
- **5.Keep Emergency Exits and Equipment Shut-offs Easily Accessible:** In case of an emergency, you'll need quick, easy access.





6.Report Unsafe Conditions To Your Supervisor: Your supervisor needs to be informed about any workplace safety hazards or risks so they can take steps to make them safe for you and your coworkers. Report all near-miss situations.

7.Use Mechanical Aids Whenever Possible: Instead of attempting to carry or lift something that's really heavy to save time, take the extra minute to use a hand truck, cart, hoist or forklift.

8.Stay Sober: Around three percent of workplace fatalities occur due to alcohol and drugs.

9.Reduce Workplace Stress: Stress can lead to depression and concentration problems, so work to reduce its creation.

10.Wear the Correct Personal Protective Equipment (PPE): PPE like hard hats, safety goggles, gloves or a full-face shield greatly reduce the risk of workplace injury



General Safety Hazards



- Travel open/flat terrain
- NO running or jumping
- Communicate Line-of-sight or radio
- Carefully examine/move things or debris for biological hazards:
 - Dangerous wildlife
 - <u>Animal bites/stings</u>
 - Toxic plants
 - Microbial









- *Excavations*, each year more then 25 workers die in excavations . Digging may be necessary to get buried drums, or to remove contaminated soil.
- The most dangerous excavation is the trench, OSHA requires shoring or sloping for trenches more than five feet deep.







Excavation = man-made **Trench** = deeper than wide

Excavation evaluation(s)

- By CP (Competent Person)
- Every day
- After hazardous event
- After weather event (rainstorm)
- Loose soil requires restraining
- Avoid edges of potentially unstable ground
- Quick exit access every 25 feet in trenches more than 4 feet deep
- Eliminate vibrations (Trucks equipment roadways) 237






Safety Hazards



• Overhead & Underground Utilities

Cranes and other equipment must maintain a sufficient clearance from overhead power lines. The minimum distance is ten feet. A greater distance is required for lines carrying more then 50 kilovolts. Remember to call dig alert and always have utility crews on-hand when performing emergency excavations

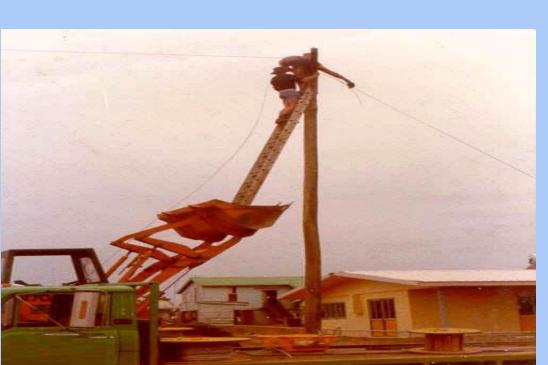









• <u>Electricity</u>

Breakers and fuses protect equipment and property, but do not necessarily protect you from shock or electrocution. Most of the current will take the path of least resistance, but a little bit might still past through your body. <u>OSHA requires</u> <u>an assured grounding program or Ground Fault Circuit</u> Interrupter.







Preventing Electrocution

- Lock-out/Tag-out (LOTO)
- De-energize circuit
- Clearly identify and isolate circuit and equipment
- Visual inspection and test to assure de-energizing
- Remove tags and locks by designated worker only












Equalizes differences in static potential



Eliminates all static potential

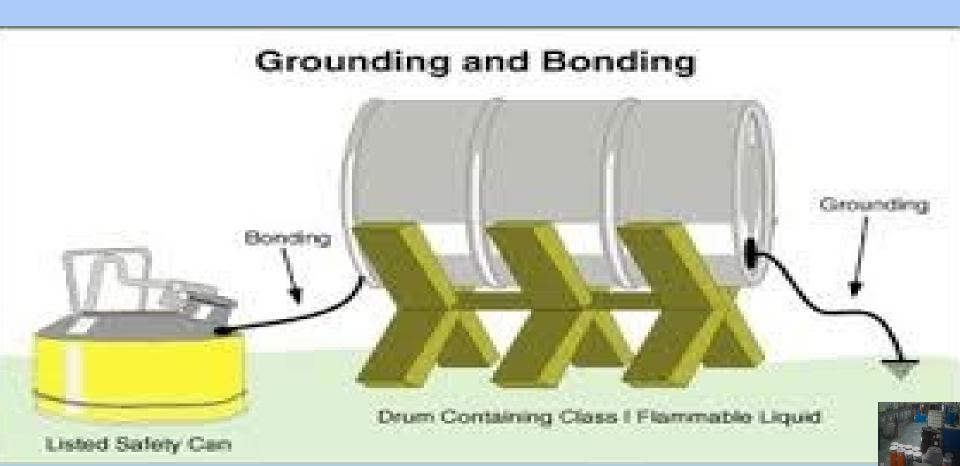



Ladder Safety





- Keep in good condition
- Periodic inspection
- No improvised repairs
 - Moveable parts should move
- Face ladder in use
- Keep rungs clean
- Secure ladder
- Intended purpose only
- Wood or fiberglass near electrical hazards
- 3 points of contact always



Measuring Noise



4

Noise is unwanted or unpleasant sound that may have a negative effect on hearing, depending on loudness and frequency and the duration of the exposure.



- Noise is measured with a sound level meter which reads in decibels "dBA". The "A" means that OSHA requires a certain type of sound level meter, an "A scale " meter. A conversation in a quit room makes about 60 dBA.
- Decibels are different than ordinary numbers. According to OSHA, every time the sound level goes up 5 dBA, it's twice as loud! So, 95 dBA is twice as loud as 90 dBA. 100 dBA is four times as loud as 90 dBA.
- If daily exposure is 90 dBA or above, OSHA requires hearing protection.







Noise Exposure



Six adverse health effects (in addition to hearing loss):

- Increased pulse rate
- Tensed muscles
- Sleeplessness
- Nervousness
- Increased blood pressure
- Irritability





Heavy Equipment



- > Avoid equipment working up-slope
- > Do not get behind equipment
- High noise levels interfere with voice and hearing
- PPE hampers vision and hearing

Make yourself known to operators

- Maintain line-of-sight with operator
- Keep equipment in sight and/or
 Use a "spotter"
 - > Use traffic control plan flaggers















Always use Safe Work Practices



Use these safe work practices when handling chemicals:

- Do not spill, splash, or drop them
- Keep flammable and combustibles away from open flames, sparks, and other sources of heat
- Do not eat or smoke in tour work area
- Wash your hands before going on break or eating









Personal Protective Equipment (PPE) is the barrier between you and the hazardous material you are working with. There are many factors to consider when choosing the proper PPE.

For example:

- **Type of PPE**
- Material PPE should consist of
- Durability
- Care of PPE
- **Availability of the PPE**
- Expense







Check the SDS




The Safety Data Sheet (SDS) is where you can find out which PPE is right for the particular chemical. This is why it is important to know the location of the SDS.





| Edt Search | Screens Tools Help | | | | n crillman |
|-----------------|---|------------|------------|--------------------|---------------------|
| a text | 🔊 - 🟠 🛛 🔎 | 1 觉 🧕 | 🗙 🔮 | 8 01 | Shine |
| nua Li | Alimente Colto | | | | 📙 🤚 🕹 Fire Mob |
| (0.0) | CAME | O Cher | minula | | |
| | CAWLE | | micais | Ser constant | ann aann |
| | Chemical Datasheet | | | Add to MyChemicals | Dvirt Friendly Page |
| , | | | | | |
| | SODIUM ALUMINATE, SOLUTION | | | | |
| rch Chemicals | | | | | |
| fearth | Chemical Identifiera I Hazardis I Response Recommendations I (Inscial Repeates I Reputation Information I Atempta Chemical Names | | | | |
| | | | | | |
| Chemicals | Chemical Identifiers | | | | |
| nicely: 0 | what is this information .) | | | | |
| MyChemicals | UN/NA Number | CAS Number | CHRIS Code | DOT Hazard Lab | el |
| edet Reactivity | 1019 | 11130-49-1 | S 540 | CORROSIVE | |
| | NEPA 704: data unavaliable | | | | |
| | General Description Water solution of the white crystalline powder. Conosive to metals and tissue. | | | | |
| | | | | | |
| | Hazards | | | | |
| | what a the reference. | | | | |
| | Reactivity Alerts | | | | |
| | rane | | | | |
| | Air & Water Reactions | | | | |
| | Sodium alutinate will dissolve in water and produce a strong corrosive alkaline solution. May generate heat when water is added. | | | | |

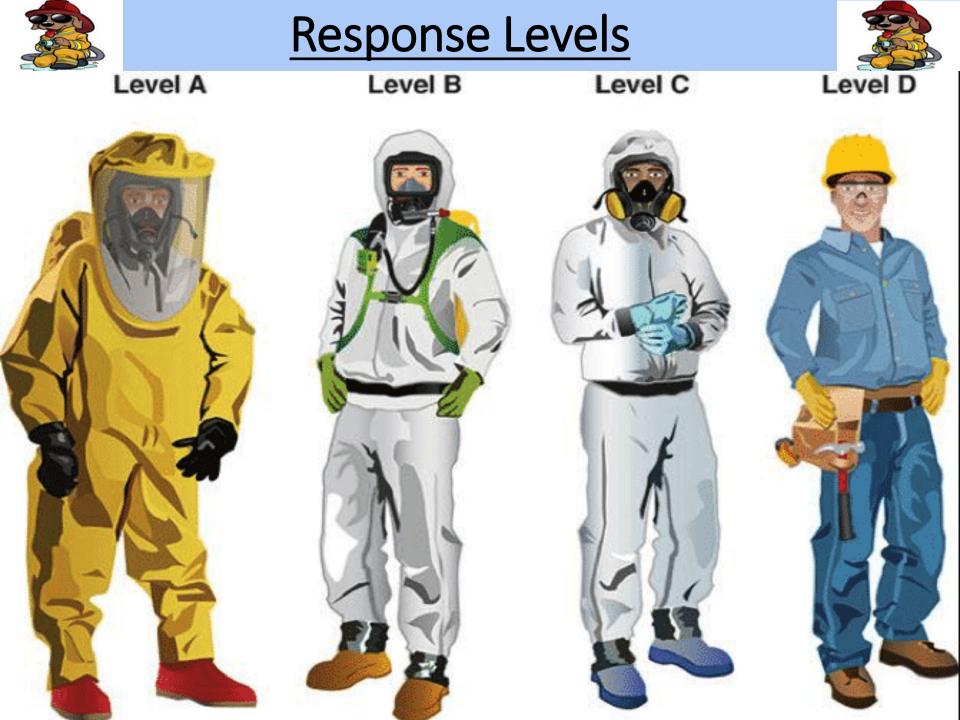



Modified Level D Protection





Modified Level D Ensemble:

- Chemical resistant coveralls
- Gloves
- Chemical boots or shoes with steel shanks and toes
- Safety glasses or splash goggles
- Hard hat





PPE is used to protect you from injury to your

eyes, hands, feet, face, skin and head.

To prevent skin absorption you must wear personal protective equipment made of the proper material. Choosing the right gloves is especially important to protect the hands.

Look on to see the importance of glove use





Nitrile Gloves 6



- Disposable <u>nitrile gloves</u> are the most common gloves used in Haz Mat; but these thin nitrile rubber provides only limited chemical protection.
- These gloves are intended to be used only as a physical barrier against brief contact with chemicals, and they need to be removed and discarded immediately after they become contaminated.

Glove materials are evaluated by there.

- **Breakthrough time**: This is how long it takes to detect a substance inside the glove when the outside is exposed to a chemical. A glove that holds ups for greater than eight hours is considered excellent.
- <u>Degradation</u>: This refers to the physical changes in the material such as swelling, cracking, softening or shrinking, which occur when it comes in contact with a chemical. A glove can exhibit chemical breakthrough even if it doesn't show signs of degradation.
- Permeation rate: This is the rate at which a substance passes through a glove material once breakthrough takes place. This rate includes absorption on the surface, diffusion through the material, and desorption on the inside surface



Nitrile Gloves 2



Selecting the right thickness

- Glove thickness is usually given in the unit mils, which is equal to one one-thousandth of an inch; therefore, a glove that is 10 mil, is 0.010 inches thick. <u>A thicker gauge glove will provide more</u> protection than a thinner glove of the same material, but often at the expense of touch-sensitivity and dexterity.
- Double-gloving can be used to increase the total breakthrough time of a particular glove, but this increases hand fatigue and overheating and is recommended only for short-duration tasks.



Nitrile Gloves 6





 Soiled gloves can contaminate objects and surfaces, later exposing you to chemical hazards. When this occurs, you can unknowingly be exposed to chemical hazards.

• Reduce the likelihood of cross contamination by:

- Changing gloves immediately when contaminated and after each chemical-handling task
- Discarding gloves immediately after use. Never reuse disposable nitrile gloves!
- Establishing designated <u>glove-only vs. no-glove</u> items such as pens, keyboards, instruments, drawers, door handles, refrigerators, and work spaces
- Do not wear gloves in hallways, offices, break rooms, elevators, restrooms, or any other public areas



| Nitrile: Short-term sp | lash protection | Nitrile has good general | |
|---|--|---|--|
| Organics | Aqueous/Inorganic | resistance to: | |
| Cyclohexane | 37% Formaldehyde | • Oils | |
| Nitrile: Short-term sp | lash protection | Nitrile has good general | |
| Organics Cyclohexane Glutaraldehyde Heptane Mineral spirits Pentane Propylene glycol Naphtha Octane Octanol Hexane Heptane | Aqueous/Inorganic37% Formaldehyde10% Hydrochloric acid37% Hydrochloric acid37% Hydrogen peroxide30% Hydrogen peroxide10% Nitric acid50% Potassium hydroxide85% Phosphoric acid50% Sodium hydroxide10 - 13% Bleach47% Sulfuric acidEthidium bromideMercury (metallic) | resistance to: Oils Fuels Some organic solvents Weak acids Weak caustics | |
| Hexane Heptane | 47% Sulfuric acid Ethidium bromide Mercury (metallic) | | |





| Nitrile: Poor protection (<1 minute) Organics | | |
|---|-----------------|--|
| Acetone | Ethanol | |
| 1,4-Dioxane | Ethyl acetate | |
| Acetonitrile | Methanol | |
| Acrylonitrile | n-Butanol | |
| Benzene | Nitrobenzene | |
| Carbon disulfide | o-Xylene | |
| Chloroform | Phenol | |
| Dichloromethane | Pyridine | |
| Diethyl ether | Tetrahydrofuran | |
| Dimethylformamide (DMF) | Toluene | |

Nitrile has poor resistance to:

- Alcohols
- Ketones
- Halogenated hydrocarbons
- Aromatic hydrocarbons
- Esters
- Ethers
- Amines
- Concentrated acids

The chemicals listed in red are able to penetrate the skin, contributing to systemic toxic effects of exposure to the chemical. (ACGIH, Skin notation)





Do Not Use Disposable, One-Time Use, Nitrile Gloves with these chemicals.

Poor resistance (<1-minute breakthrough) + Skin corrosion hazard and/or high toxicity

Concentrated acetic acid70% Nitric acid30% Ammonium hydroxide95% Sulfuric acid88% Formic acid*Hydrofluoric acid (HF)

These are just a few examples. This is not a complete list.











Street Smart Chemistry



Everything you need to know is in section 9 of your SDS Physical and Chemical Properties



Physical State Liquid

Appearance Colorless

Odor sweet

Odor Threshold 19.8 ppm

<mark>рН</mark> 7

Melting Point/Range -95 °C / -139 °F

Boiling Point/Range 56 °C / 132.8 °F

Flash Point -20 °C / -4 °F Method - Closed cup

Evaporation Rate 5.6 (Butyl Acetate = 1.0)

Flammability (solid,gas) Not applicable

Flammability or explosive limits Upper 12.8 Lower 2.5 vol

Vapor Pressure 247 mmHg @ 20 °C

Vapor Density 2.0

Specific Gravity 0.790

KNOW FOR SURE





Lets Learn CELSIUS 8



Only three countries do not use the metric system: the United States, Liberia and Burma


Easy way to give a rough number

Lets convert Celsius to Fahrenheit

- Take 10 degrees Celsius
- X 2 plus 30
- <u>This equals 50 degrees Fahrenheit</u>

Lets convert Fahrenheit to Celsius

- # Take 80 degrees Fahrenheit
- # Minus 30 then divide by 2
- # This equals 25 Celsius
- Add 273 to equal Kelvin & 457 for Fahrenheit

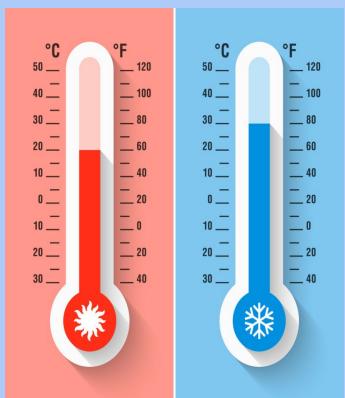





062

- The weight of a given volume of vapor or gas compared to the weight of an equal volume of dry air at the same temperature and pressure.
- •Air = 1
- •MW = 29
- RD same as VD
- Numeric values for chemicals that are less than 1 indicate that the specific chemical gas will rise.
- Vapor Densities greater than one will indicate a vapor or gas will settle or sink.

Illuminating Gases "Nat Gas" Neon Fluoride Carbon monoxide Ammonia Nitrogen VAPOR DENSITY Helium Methane **Ethylene Acetylene** Methllithium Diborane Helium Hydrogen Propane



Specific Gravity

2



- •The Weight of a Substance Compared to the Weight of an Equal Amount of Water.
- Water Is 1.
- •Numbers Less Than One Float
- Greater Than One Sink in Water.










<u>Solubility</u> refers to the degree in which a substance will dissolve in water

- **Miscibility** is the ability of a liquid to dissolve in water
- Miscible means that it will totally dissolve in water
- Polar compounds, which have slight electrical charges, dissolve in water and non-polar compounds
- do not mix with water.
- Examples; Acetone - **miscible** Ethylene Oxide - **miscible** Sulfuric Acid - **miscible**

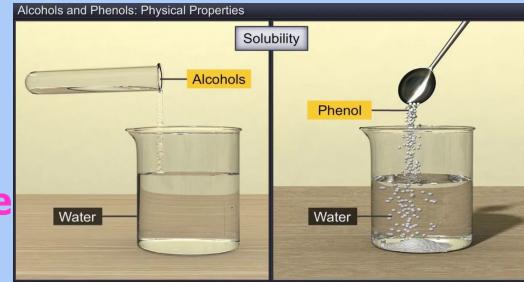



Vapor Pressure



- Vapor Pressure is the pressure exerted by the vapor that is in equilibrium with the liquid at a given temperature.
- It is a measure of a liquids ability to evaporate or give off vapors.
 - •JUST REMEMBER THE HIGHER THE VP THE MORE DANGEROUS THE CHEMICAL IS TO YOU.





Vapor Pressure 3



- Amount of force pushing vapors from a liquid measured as the force of the vapors
- The higher the force the more vapors produced
- Vapor pressure is an indicator of a material's volatility

Water is 17 mm Hg

>50 mm Hg = Inhalation Hazard

You may see VP in measurements of mmHg "millimetre of mercury" kPa "kilopascal"

<u>atm</u> vp > 760 mm HG = 1 ATM = 14.7 psi are usually a gas






Common Vapor Pressures


- <u>Water 17 mm Hg</u>
- Acetone 180 mm Hg
- Gasoline 300 mm Hg
- Ethyl ether 440 mm Hg
- Methyl alcohol 100 mm Hg

Vapor Pressure

- Dependent on temperature and particle size

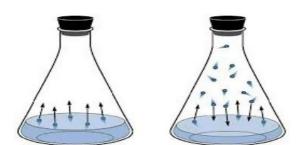

- Diesel fuel 5 mm Hg
- Sodium hydroxide 1 mm Hg @ 2534^o F
- Sulfuric acid 0.001 mm Hg

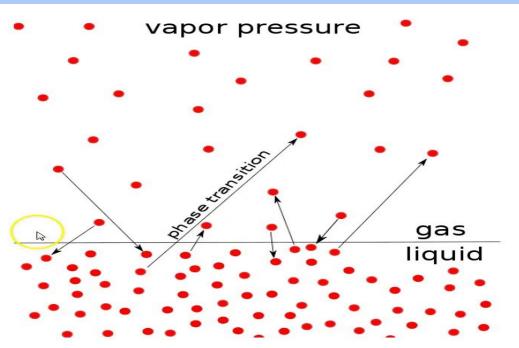



Boiling Point



The boiling point of a substance is the temperature at which the vapor pressure of the liquid equals the environmental pressure surrounding the liquid.

| Во | oiling Point | Chemical | Boiling Point | | | | | |
|---|------------------|----------|---------------|--|--|--|--|--|
| 52'F | | Water | 212 F | | | | | |
| | | Gasoline | 105 F | | | | | |
| Chlorine Dioxide 98°F | | Butane | 31 F | | | | | |
| | | Propane | - 41 F | | | | | |
| | Chlorine Dioxide | Oxygen | - 297 F | | | | | |
| | 4°F | Hydrogen | - 423 F | | | | | |
| The Lower the Boiling Point the Higher the Vapor Pressure | | | | | | | | |

The Higher the Boiling Point the Lower the Vapor Pressure



Expansion Ratios



• The amount of vapor that is produced from the liquid or liquefied product.

З

- Many product give off vapors.
- The amount is usually given in the form of a ratio.

Nitrogen 1 to 696 liquid helium 1 to 757 argon 1 to 847 liquid hydrogen 1 to 851 liquid oxygen 1 to 860 Neon has the highest expansion ratio with 1 to 1438.







FLASH POINT



• The minimum temperature at which a liquid gives off vapors to form an ignitable mixture at with air near the liquids surface.

| Chemical | Flash Point |
|------------------|-------------|
| Gasoline | - 45° F |
| Carbon Disulfide | - 22° F |
| Fuel Oil | 105° F |



The Lower the FP the more dangerous the chemical is to you





• The range or limit (high and low) that the vapors will be mixed sufficiently in air to ignite.

| Chemical | LEL | UEL |
|-----------------|------|-------|
| Jet Fuel | 0.7% | 5.0% |
| Acetone | 2.6% | 12.6% |
| Ethylene Oxide | 3% | 100% |

The Wider the Range the More Dangerous it is in terms of Flammability





Your chemical has a Vapor pressure of 24 mm Hg Flash point of 420 degrees IDLH of 5 ppm



Which is the greatest hazard ???





Your chemical has a
Flammable range of 3 to 90
Vapor pressure of 330 mm Hg
IDLH of 30,000 ppm



Which is the greatest hazard ???





Your chemical has a Specific gravity 3.5



Does this float or sink in water





Your chemical has a
Vapor pressure of 6650 mm Hg
Flash point of 1800 degrees
IDLH of 15 ppm



What is my biggest hazard ?? Do I Evacuate or shelter in place ??





Your chemical has a Ph of 1 and is fuming

- Level A
- Level C
- Firefighter turnouts


What PPE do I wear ???







Your chemical has a
Boiling point of 85 degrees
Flash point of -45
IDLH of 25 ppm

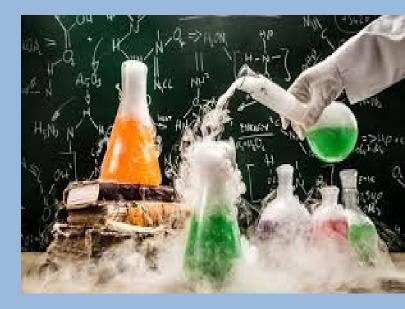

What is my biggest hazard ???





My chemical has a CGI reading of 14% LEL

What PPE do I wear ?? Can I make entry ??








My Chemical has a
CGI reading of 1 LEL
Flash point is 3000 degrees
Ph of 13



What PPE do I wear ???





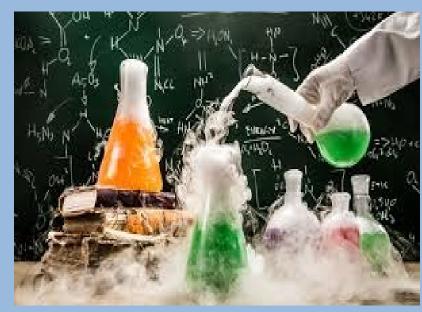

My Chemical has a
Vapor pressure of .5

Does my chemical float or sink in air ????





Remember!

- •First Operational Thought = Safety!
- •First Operational Priority = Isolate, Deny Entry
- •Be A Sinner = Safety = Isolation = Notification







Any Questions?





Concluding Remarks





Make a positive difference!
 Be part of the solution — Not part of the problem!
 And don't forget:
 Let's be careful & competent out there!

Brian Otter

Fire Dog Haz Mat Training 909-440-0383 Hazmat522@gmail.com



Thank you to all our 2022 SPONSORS and EXHIBITORS!

